

Ultra-Reliable Low Pass Filter

VLP-20

50Ω DC to 1700 MHz



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	14W max. at 25°C

* Passband rating, derate linearly to 0.4xPmax at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

Features

- rugged unibody construction
- low insertion loss passband, less than 1 dB typ.
- excellent power handling, 14W
- low cost


Applications

- harmonic rejection
- transmitters/receivers
- lab use

CASE STYLE: FF704

Connectors	Model	Price	Qty.
SMA	VLP-20	\$24.95 ea.	(1-9)

Outline Drawing

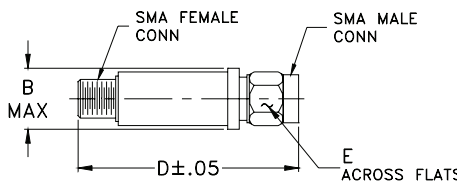


Outline Dimensions (inch/mm)

B	D	E	wt
.410	1.43	.312	grams
10.41	36.32	7.92	10.0


Electrical Specifications (T_{AMB}=25°C)

PASSBAND (MHz) (loss < 1 dB)	f _{co} , MHz Nom. (loss 3 dB)	STOP BAND (MHz)			VSWR (:1) Passband Typ.
		(loss > 20 dB)	(loss > 40 dB)	f _{r20} dB Typ.	
DC-1700	1980	2700	3300-3750	7200	1.1

typical frequency response





electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.00	0.05	1.01
1000.00	0.45	1.18
1700.00	0.80	1.13
1980.00	2.56	2.78
2700.00	24.06	35.85
3300.00	45.92	38.05
3880.00	42.96	36.25
5000.00	36.56	43.07
7200.00	24.22	24.89
9000.00	7.43	5.58

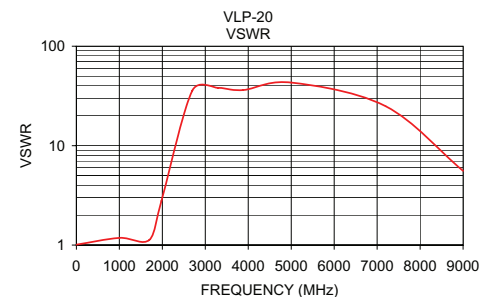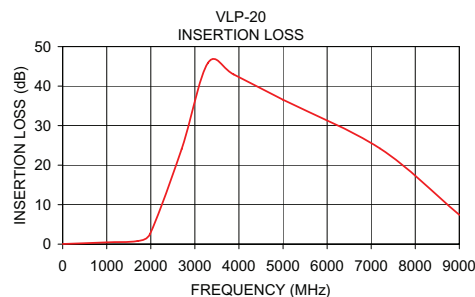

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

PCB12 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. B
M111199
VLP-20
ED-10545B/4
WZ/AD/CP
070426