

DC Pass Directional Coupler

ZADC-20-7550DC+

75Ω/50Ω Up to 5W 800 to 1450 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	2A

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

INPUT (75Ω) F-TYPE	1
OUTPUT (75Ω) F-TYPE	3
COUPLED (50Ω) N-TYPE	2

Features

- wideband, 800 to 1450 MHz
- low insertion loss, 0.8 dB typ.
- good directivity, 25 dB typ.
- 75 ohm for IN and OUT ports, 50 ohm for coupled port
- DC current through input to output 2A Max.

Applications

- cellular
- PCS
- labs



CASE STYLE: CC51-1

Connectors	Model	Price	Qty.
F-TYPE 75Ω N-TYPE 50Ω	ZADC-20-7550DC+	\$99.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Directional Coupler Electrical Specifications


FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS ¹		DIRECTIVITY (dB)		VSWR (-1)	POWER INPUT (W)
	Nom.	Flatness	Typ.	Max.	Typ.	Min.	Typ.	Max.
f _L -f _U								
800-1000	19.5±1	±0.75	0.7	1.0	25	17	1.15	5
1000-1450	20±1	±0.85	0.8	1.2	23	16	1.15	5

1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data




Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
800.00	0.54	20.04	24.15	21.18	20.77	30.98
850.00	0.59	19.81	25.48	21.37	20.80	30.87
950.00	0.63	19.49	29.17	22.13	21.22	30.28
1000.00	0.63	19.38	31.97	22.67	21.61	29.71
1050.00	0.64	19.32	36.18	23.38	22.12	29.06
1100.00	0.64	19.29	43.17	24.31	22.77	28.27
1200.00	0.65	19.36	34.30	26.76	24.73	26.70
1300.00	0.66	19.60	27.22	29.53	27.68	25.21
1400.00	0.65	20.01	22.90	28.57	30.73	23.91
1450.00	0.65	20.28	21.71	26.56	30.76	23.34

Outline Drawing

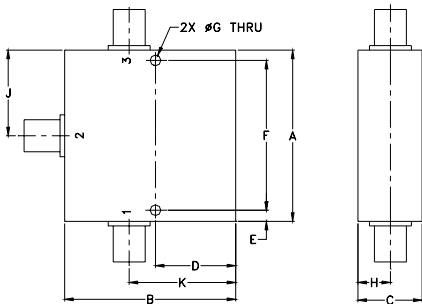


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	wt
2.00	2.00	.75	.938	.13	1.750	.125	.38	1.00	1.25	grams
50.80	50.80	19.05	23.83	3.30	44.45	3.18	9.65	25.40	31.75	145.0

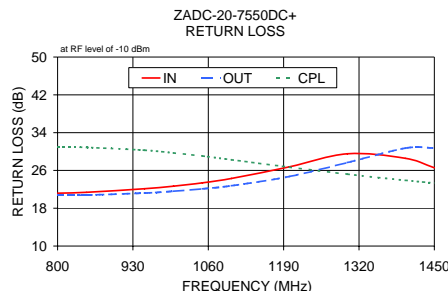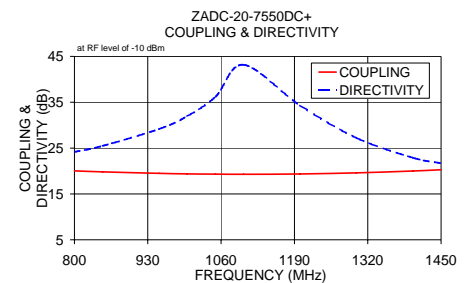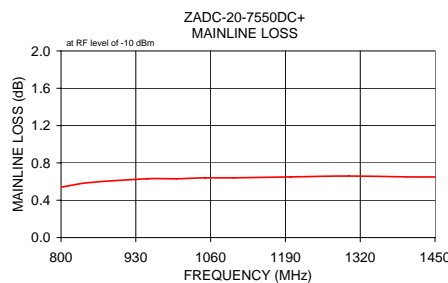

Electrical Schematic

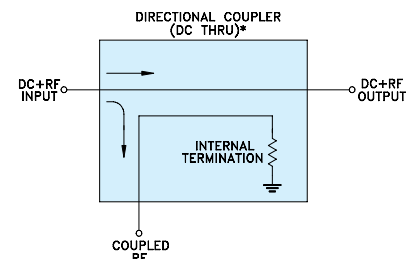

* ELECTRICAL SCHEMATIC FOR DIRECTIONAL COUPLER THAT IS DESIGNED WITHOUT INTERNAL TRANSFORMERS. For detailed performance specs. & shopping online see web site



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M119986
ED-12622/1
ZADC-20-7550DC+
WZ/CP/AM
090915