

Coaxial

Power Splitter/Combiner

ZC16PD-1900W

16 Way-0° 50Ω 1500 to 2100 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	2.4W max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections


SUM PORT	S
PORT 1,2,3,.....,16	1,2,3,.....,16

Features

- high isolation, 30 dB typ.
- excellent VSWR, 1.2:1 typ.
- up to 10W power input as splitter
- rugged shielded case

Applications

- DCS
- PCS
- communication systems
- instrumentation

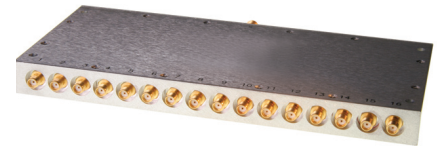


CASE STYLE: UU179

Connectors	Model	Price	Qty.
SMA	ZC16PD-1900W-S	\$319.00	(1-9)

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 12 dB		AMPLITUDE UNBALANCE (dB)	VSWR (:1)			
	Typ.	Min.	Typ.	Max.		S		OUT	
f_L - f_U					Max.	Typ.	Max.	Typ.	Max.
1500-2100	30	15	0.7	1.4	0.8	1.25	1.6	1.15	1.35



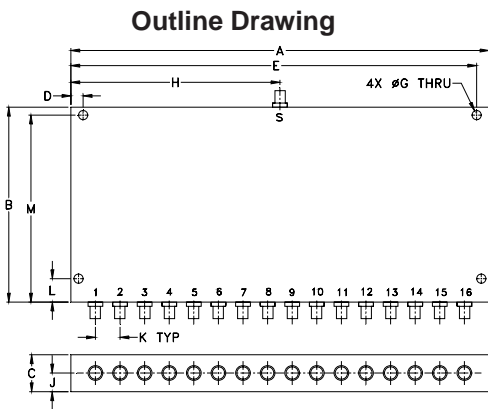


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
8.50	3.95	.75	.250	8.250	-	.187
215.90	100.33	19.05	6.35	209.55	-	4.75
H	J	K	L	M	wt	
4.250	.38	.500	.475	3.475	grams	
107.95	9.65	12.70	12.07	88.27	710	

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)	Amplitude Unbalance (dB)	Isolation (dB)		VSWR S	VSWR 1
			S-1	Adjacent Opposite		
			1500.00	12.70		
1521.00	12.67	0.07	23.25	56.69	1.32	1.09
1582.50	12.62	0.19	25.75	55.05	1.25	1.09
1624.50	12.57	0.17	28.37	54.07	1.18	1.08
1665.00	12.60	0.07	32.23	51.78	1.12	1.08
1699.50	12.58	0.14	35.77	49.82	1.07	1.07
1707.00	12.52	0.08	35.79	48.34	1.07	1.07
1768.50	12.61	0.10	39.11	47.58	1.06	1.07
1825.50	12.55	0.15	35.46	47.33	1.07	1.08
1872.00	12.61	0.16	34.44	47.08	1.09	1.08
1935.00	12.61	0.17	26.81	47.46	1.13	1.09
1996.50	12.61	0.21	25.30	51.19	1.20	1.09
2038.50	12.56	0.24	21.67	53.64	1.24	1.09
2100.00	12.66	0.18	20.82	57.50	1.25	1.09
2100.00	12.66	0.19	19.66	56.81	1.25	1.09

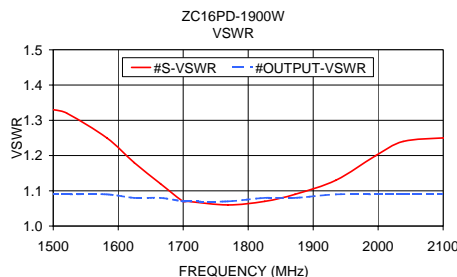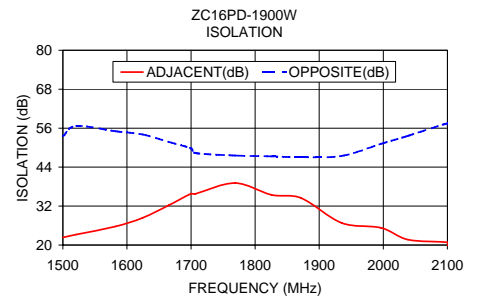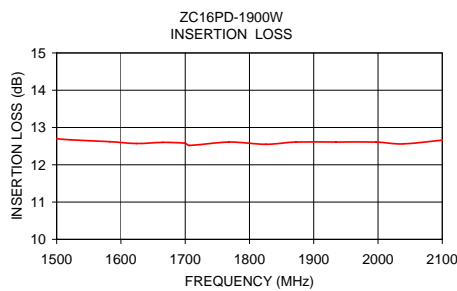

electrical schematic



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 www.minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M95084
ZC16PD-1900W
HY/TD/CP
090827