

Coaxial

# Power Splitter/Combiner

## ZC16PD-900

16 Way-0° 50Ω 800 to 900 MHz

### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	2.4W max.

Permanent damage may occur if any of these limits are exceeded.

### Coaxial Connections

SUM PORT	S
PORT 1,2,3,.....,16	1,2,3,.....,16

### Outline Drawing

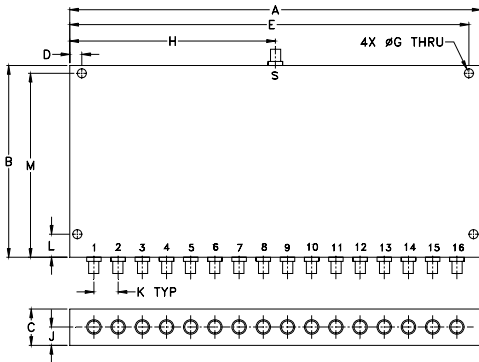

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
8.50	3.95	.75	.250	8.250	—	.187
215.90	100.33	19.05	6.35	209.55	—	4.75
H	J	K	L	M	wt	
4.250	.38	.500	.475	3.475	grams	
107.95	9.65	12.70	12.07	88.27	710	

### Features

- excellent VSWR, 1.1:1 typ.
- high isolation, 32 dB typ.
- low insertion loss, 0.5 dB typ.
- up to 10W power input as splitter
- rugged shielded case

### Applications

- cellular
- UHF
- signal processing



CASE STYLE: UU179




Connectors	Model	Price	Qty.
SMA	ZC16PD-900-S	\$295.00	(1-9)

### Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 12 dB		AMPLITUDE UNBALANCE (dB)	VSWR (:1)			
	Typ.	Min.	Typ.	Max.		S		OUT	
$f_L$ - $f_U$					Max.	Typ.	Max.	Typ.	Max.
800-900	32	20	0.5	1.0	0.5	1.06	1.2	1.06	1.2

### Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)	Amplitude Unbalance (dB)	Isolation (dB)		VSWR S	VSWR 1
			S-1	1-2, 1-9		
800.00	12.43	0.20	31.27	64.26	1.08	1.07
807.75	12.42	0.20	31.75	58.34	1.07	1.07
815.50	12.40	0.21	32.12	54.41	1.06	1.06
823.00	12.41	0.21	32.38	52.04	1.05	1.05
830.75	12.41	0.19	32.54	49.87	1.05	1.05
838.50	12.41	0.19	32.58	48.45	1.04	1.04
846.25	12.44	0.21	32.57	46.96	1.03	1.04
853.75	12.43	0.20	32.41	46.07	1.03	1.03
861.50	12.41	0.21	32.14	44.92	1.02	1.03
869.25	12.42	0.21	31.78	44.07	1.01	1.02
877.00	12.41	0.20	31.33	43.18	1.01	1.02
884.50	12.40	0.21	30.88	42.47	1.01	1.01
892.25	12.42	0.21	30.37	41.75	1.01	1.01
897.50	12.41	0.25	29.98	41.34	1.02	1.01
900.00	12.42	0.24	29.77	41.20	1.02	1.01

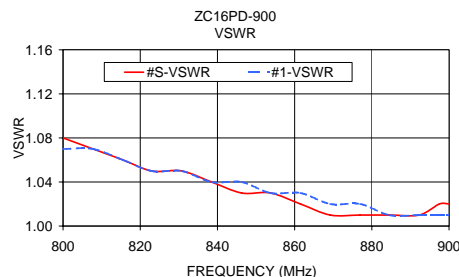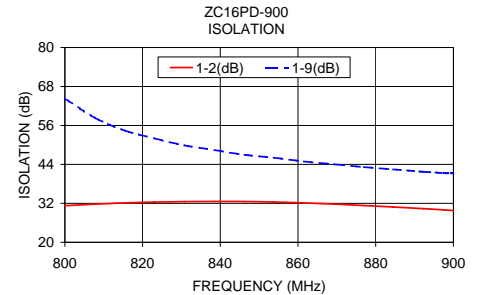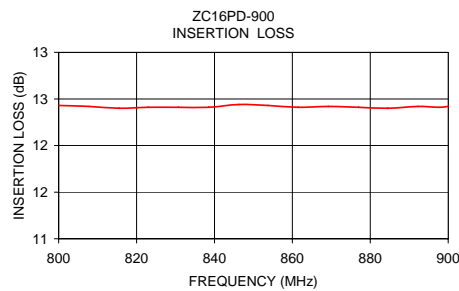

### electrical schematic

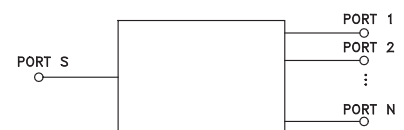

**Mini-Circuits®**  
 ISO 9001 ISO 14001 AS 9100 CERTIFIED  
 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)  
 FIFTH MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. OR  
 M95084  
 ZC16PD-900  
 HY/TD/CP  
 090827