

Coaxial High Pass Filter

ZFHP-3800+

50Ω

3800 to 6000 MHz

The Big Deal

- Low insertion loss
- Good rejection
- Connectorized package



CASE STYLE: H16

Product Overview

ZFHP-3800+ is a High pass filter in a fabricated using connectorized package. This filter offers low insertion loss and good rejection. This will find its applications in transmitter and receivers.

Key Features

Feature	Advantages
Low insertion loss	Can be used in high performance applications.
Good rejection	This enables the filter to attenuate spurious signals and reject harmonics till 3GHz.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial High Pass Filter

50Ω 3800 to 6000 MHz

ZFHP-3800+



Features

- Wide band, 3800 MHz to 6000 MHz
- Low insertion loss
- Connectorized package

CASE STYLE: H16

Connectors Model
SMA-FEMALE ZFHP-3800-S+
BRACKET (OPTION "B")

Applications

- Sub-harmonic rejection
- Transmitter \ receiver
- Lab use

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Stop Band	Rejection Loss	DC-F1	10-3170	20	27.3	-
	VSWR	DC-F1	10-3170	-	20	-
Pass Band	Insertion Loss	F2-F3	3800-6000	-	1.0	2
	VSWR	F2-F3	3800-6000	-	1.5	2.5

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	2W max.

Permanent damage may occur if any of these limits are exceeded.


Functional Schematic

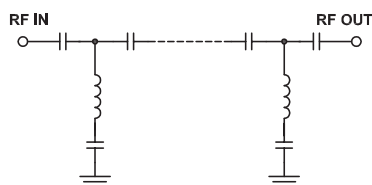

Typical Performance Data at 25°C




Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10.0	105.44	2184.20
450.0	77.87	136.92
550.0	76.20	133.47
1230.0	78.93	123.66
1450.0	68.10	120.30
1910.0	56.12	115.68
2510.0	48.88	96.18
2790.0	50.77	72.36
3150.0	33.01	27.15
3170.0	30.16	24.42
3240.0	20.34	14.97
3300.0	12.25	7.84
3305.0	11.61	7.33
3400.0	3.20	1.96
3435.0	2.16	1.55
3625.0	0.96	1.13
3800.0	0.84	1.38
3950.0	0.74	1.37
5000.0	0.61	1.40
6000.0	0.51	1.22

Typical Frequency Response



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

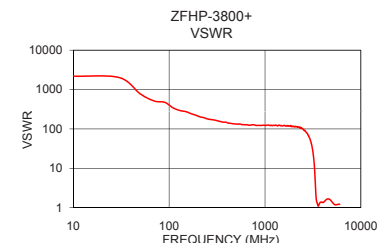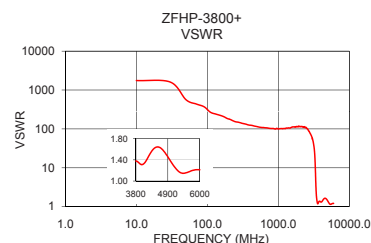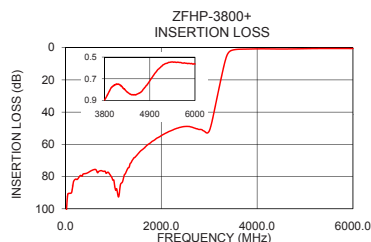

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV OR
M153319
ZFHP-3800+
EDU2097/1
URJ
160430
Page 2 of 3

Coaxial Connections

INPUT	SMA-Female
OUTPUT	SMA-Female

Outline Drawing

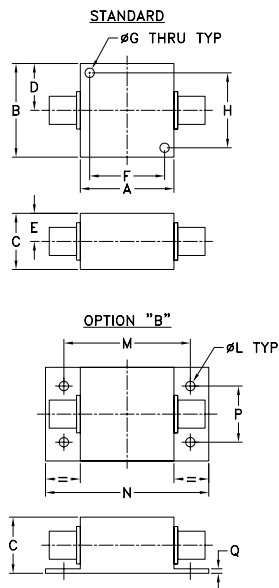

Outline Dimensions ($\frac{\text{inch}}{\text{mm}}$)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	1.000	.125	1.000
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40
J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.18	.750	.06	grams
--	--	3.18	42.88	55.37	19.05	1.52	70.0

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp