

Coaxial I&Q Modulator

ZFMIQ-70ML

50Ω

66 to 73 MHz



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
LO Power	50mW
I&Q Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

LO (carrier)	1
RF (signal)	3
I (0°)(ref.)	S
Q (90°)*	2

*Q= I +90° for lower sideband suppression

Features

- rugged shielded case
- excellent 3rd and 5th order harmonic suppression
- good carrier and sideband rejection

Applications

- radar and communication systems

CASE STYLE: J17

Connectors	Model	Price	Qty.
SMA	ZFMIQ-70ML	\$89.95	(1-9)
BRACKET (OPTION "B")		\$2.50	(1+)

Modulator Electrical Specifications


FREQUENCY (MHz)				CONVERSION LOSS (dB)			CARRIER REJECTION (-dBc)		SIDE BAND REJECTION (-dBc)		HARMONIC SUPPRESSION (-dBc)					
RF (SIGNAL)		LO (CARRIER)		I&Q		\bar{x}	σ	Max.	Typ.	Min.	Typ.	Min.	3XI/Q		5XI/Q	
f_L	f_U	Min.	Max.	Min.	Max.								Typ.	Min.	Typ.	Min.
66	73	DC	5	5.7	0.1	6.5			38	30	38	30	48	43	58	55

Operating LO power: 10±1dBm
 1dB Compression: 0dBm typical
 Conversion Loss: (I + Q) power, dBm - RF power, dBm
 Carrier and sideband rejections measured at -5dBm I/Q power.

Typical Performance Data




Carrier Freq. (MHz)	Conversion Loss		Sideband Rejection (\bar{x})		Carrier Rejection (\bar{x})		3rd Harmonic Suppression (\bar{x})		5th Harmonic Suppression (\bar{x})		DC Offset (\bar{x}) (mV)
	\bar{x} (dB)	σ (dB)	LSB (-dBc)	USB (-dBc)	LSB (-dBc)	USB (-dBc)	LSB (-dBc)	USB (-dBc)	LSB (-dBc)	USB (-dBc)	
66.00	5.20	0.00	38.26	37.56	54.72	55.04	47.30	47.58	74.90	73.48	0.09
66.40	5.20	0.00	38.36	37.72	54.40	54.88	47.32	47.66	75.06	73.86	0.09
66.70	5.20	0.00	38.50	37.76	54.58	54.66	47.34	47.68	75.52	74.60	0.09
67.10	5.20	0.00	38.54	37.92	54.10	54.64	47.34	47.68	74.94	75.12	0.09
67.50	5.20	0.00	38.60	38.08	54.36	54.30	47.42	47.72	74.76	75.22	0.09
67.80	5.20	0.00	38.72	38.22	53.88	53.98	47.44	47.74	74.84	74.94	0.08
68.20	5.20	0.00	38.74	38.40	53.96	53.92	47.48	47.72	75.42	74.58	0.08
68.60	5.20	0.00	38.78	38.58	53.56	53.70	47.44	47.74	74.38	74.54	0.08
69.00	5.18	0.04	38.88	38.76	53.64	54.10	47.52	47.80	75.04	75.38	0.08
69.30	5.20	0.00	38.94	38.94	53.36	54.12	47.56	47.80	74.86	75.12	0.08
69.70	5.20	0.00	38.98	39.06	53.16	53.78	47.50	47.76	75.14	74.96	0.08
70.10	5.20	0.00	39.12	39.30	53.02	53.70	47.54	47.78	73.92	75.16	0.08
70.40	5.18	0.04	39.16	39.46	53.16	53.52	47.58	47.72	73.98	74.88	0.08
70.80	5.20	0.00	39.20	39.60	53.10	53.54	47.58	47.72	74.16	75.04	0.08
71.20	5.18	0.04	39.24	39.88	53.02	53.34	47.58	47.72	74.02	74.48	0.08
71.50	5.20	0.00	39.30	40.00	52.62	53.52	47.60	47.76	73.80	74.98	0.08
71.90	5.18	0.04	39.46	40.18	52.78	53.30	47.60	47.80	73.76	74.44	0.08
72.30	5.20	0.00	39.50	40.36	52.40	53.58	47.58	47.74	74.30	74.66	0.08
72.60	5.20	0.00	39.66	40.50	52.30	53.22	47.64	47.78	73.72	74.46	0.09
73.00	5.18	0.04	39.76	40.76	52.16	53.02	47.62	47.78	72.70	73.16	0.09

Outline Drawing

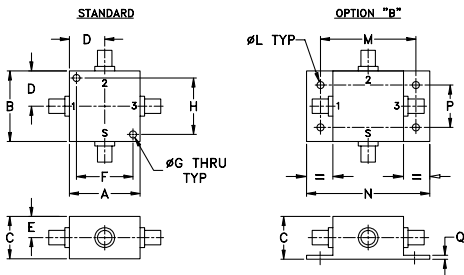


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	wt
1.25	1.25	.75	.63	.38	1.000	.125	1.000	--	--	.125	1.688	2.18	.75	.07	grams
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40	--	--	3.18	42.88	55.37	19.05	1.78	75.0

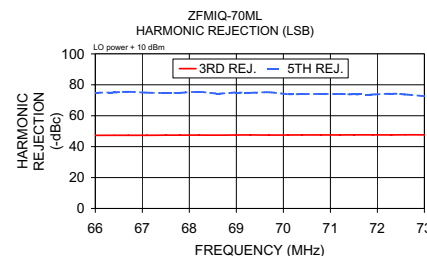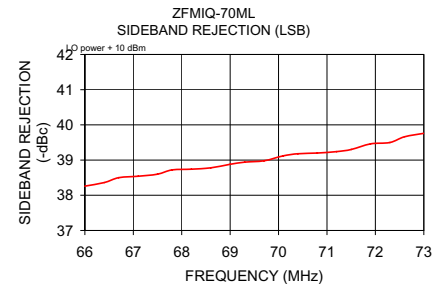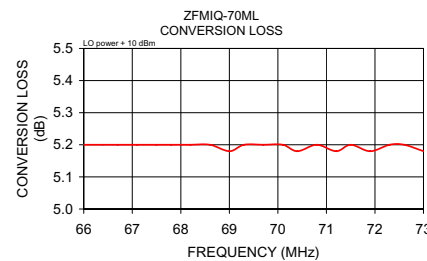

I&Q modulation block diagram



For detailed performance specs & shopping online see web site



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M97465
ZFMIQ-70ML
DJ/VV/CP
080310