

Coaxial Amplifier

ZHL-42


50Ω Medium High Power 700 to 4200 MHz

Features

- wideband, 700 to 4200 MHz
- high IP3, +38 dBm typ
- high gain, 30 dB min.
- medium high power, 28 dBm min.

Applications

- communication systems
- instrumentation
- cellular
- laboratory



CASE STYLE: U36

Connectors	Model	Price	Qty.
SMA	ZHL-42	\$895.00 ea.	(1-9)

Electrical Specifications

MODEL NO.	FREQ. (MHz)		GAIN (dB)		MAXIMUM POWER OUTPUT (dBm)		DYNAMIC RANGE		VSWR (:1) Max.		DC POWER	
	f_L	f_U	Min.	Flatness Max.	(1 dB Compr.) Min.	Input (no damage)	NF (dB) Typ.	IP3 (dBm) Typ.	In	Out	Volt (V) Nom.	Current (A) Max.
ZHL-42	700	4200	30	±1.0*	+28	+5	10.0	+38	2.5	2.5	15	0.88

* Measured at 25°C

Open load is not recommended, potentially can cause damage.

With no load derate max input power by 20 dB

Maximum Ratings


Operating Temperature -20°C to 65°C

Storage Temperature -55°C to 100°C

DC Voltage +20V Max.

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

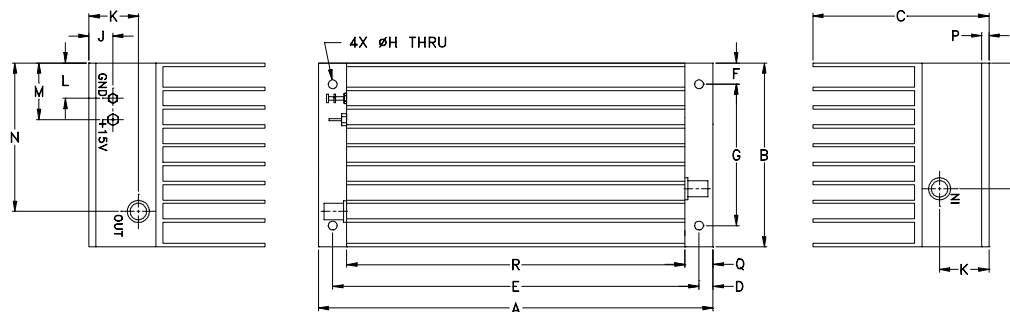

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	wt
7.00	3.25	2.13	.25	6.500	.38	2.500	.156	.73	.88	.63	1.13	2.23	.125	.50	6.00	2.23	grams
177.80	82.55	54.10	6.35	165.10	9.65	63.50	3.96	18.54	22.35	16.00	28.70	56.64	3.18	12.70	152.40	56.64	900

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M98142
ZHL-42
090819
Page 1 of 2

FREQUENCY (MHz)	GAIN (dB)			DIRECTIVITY (dB)			VSWR (:1)		NOISE FIGURE (dB)	POUT at 1 dB COMPR. (dBm)
	12V	15V	16V	12V	15V	16V	IN	OUT		
700.00	31.34	33.00	32.99	34.70	35.90	41.90	1.55	1.47	8.63	28.60
814.00	31.52	33.02	33.00	34.30	31.40	23.70	1.60	1.40	8.12	28.78
1020.80	31.78	33.03	33.04	34.50	37.70	35.40	1.53	1.51	7.74	29.48
1280.10	32.07	33.21	33.20	34.60	31.70	32.40	1.28	1.78	7.54	29.71
1605.20	31.92	33.15	33.14	32.20	33.80	41.80	1.47	1.81	7.49	30.02
1956.40	31.68	32.97	32.96	28.00	30.30	29.70	1.58	1.58	7.67	29.81
2225.60	31.57	32.90	32.89	49.40	35.10	30.30	1.38	1.36	7.58	29.28
2494.90	31.58	32.98	32.99	29.30	30.80	24.80	1.15	1.36	7.55	28.32
2674.40	31.83	33.29	33.29	33.80	26.30	22.80	1.18	1.58	7.54	28.40
2853.80	31.99	33.45	33.46	31.20	26.30	42.00	1.21	1.78	7.55	29.02
3123.10	31.71	33.00	33.01	30.00	26.80	28.50	1.16	1.92	7.59	29.90
3392.30	32.27	33.29	33.30	33.30	21.90	35.80	1.32	1.80	7.58	29.85
3661.50	31.99	32.65	32.64	35.50	23.30	29.60	1.82	1.60	7.41	29.43
3930.80	32.37	32.95	32.93	28.10	23.40	31.20	1.87	1.35	7.53	28.30
4200.00	32.24	33.12	33.13	28.10	25.90	21.50	1.52	1.20	7.52	28.61

