

Coaxial

Power Splitter/Combiner

ZMSC-2-2

2 Way-0° 50Ω 0.002 to 60 MHz



Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	2
PORT 1	1
PORT 2	3

Outline Drawing

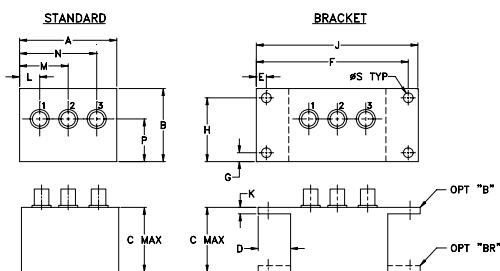

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	
1.50	1.13	1.00	.50	.155	2.345	.138	.987	
38.10	28.70	25.40	12.70	3.94	59.56	3.51	25.07	
J	K	L	M	N	P	S	wt	
2.50	.10	.31	.75	1.19	.66	.150	grams	
63.50	2.54	7.87	19.05	30.23	16.76	3.81	40.0	

Features

- wideband, 0.002 to 60 MHz
- low insertion loss, 0.3 dB typ.
- good isolation, 30 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.2 deg. typ.
- rugged shielded case

Applications

- HF
- amateur radio
- federal communications

CASE STYLE: M21

Connectors	Model	Price	Qty.
SMA	ZMSC-2-2	\$59.95	(1-9)
BRACKET (OPTION "B")		\$5.00	(1+)
BRACKET (OPTION "BR")		\$1.50	(1+)

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB)** ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L*		M		U		L		M		U		L	M	U	L	M	U
f_L - f_U	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
0.002-60	27	20	30	20	27	20	0.3	0.6	0.3	0.6	0.6	1.0	2	3	4	0.15	0.25	0.3

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

* Isolation specified to 0.004 MHz

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2					
0.002	3.18	3.17	0.01	17.44	1.30	1.62	1.62
0.01	3.13	3.12	0.01	24.03	1.18	1.06	1.06
0.02	3.12	3.11	0.01	29.51	1.17	1.06	1.06
0.05	3.10	3.11	0.01	35.51	1.18	1.06	1.05
0.10	3.13	3.13	0.00	49.92	1.19	1.05	1.05
1.00	3.13	3.13	0.00	51.68	1.20	1.04	1.04
5.00	3.16	3.16	0.00	39.50	1.21	1.04	1.03
9.90	3.22	3.22	0.00	34.91	1.22	1.04	1.04
14.30	3.24	3.25	0.01	32.76	1.23	1.04	1.04
19.90	3.29	3.29	0.00	30.66	1.23	1.05	1.05
30.90	3.35	3.35	0.00	28.08	1.23	1.07	1.07
41.10	3.41	3.40	0.01	26.55	1.22	1.09	1.09
50.50	3.46	3.45	0.01	25.62	1.22	1.12	1.12
54.50	3.47	3.46	0.01	25.23	1.23	1.10	1.10
60.00	3.49	3.50	0.01	24.87	1.22	1.12	1.12

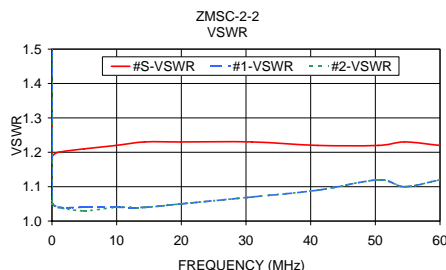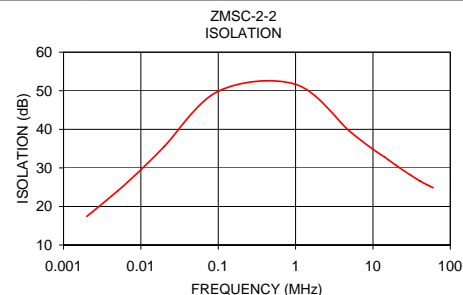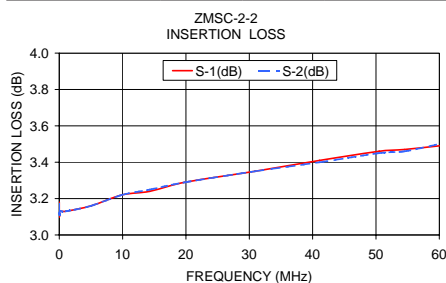

electrical schematic



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M9482
ZMSC-2-2
HY/TD/CP/AM
090824