

Coaxial

# Power Splitter/Combiner

ZMSCJ-2-2

2 Way-180° 50Ω 0.01 to 20 MHz



## Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.
Permanent damage may occur if any of these limits are exceeded.	

## Coaxial Connections

SUM PORT	2
PORT 1	1
PORT 2	3

## Features

- low insertion loss, 0.2 dB typ.
- high isolation, 30 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 1 deg. typ.
- good VSWR, 1.15:1 typ.
- rugged shielded case

## Applications

- HF
- radio communication
- instrumentation
- signal processing

## Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
0.01-20	35	25	30	25	25	18	0.3	0.8	0.2	0.5	0.3	0.6	1*	2	2.5	0.1	0.1	0.2

L = low range [ $f_L$  to  $10 f_L$ ] M = mid range [ $10 f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]  
 At low range frequency band ( $f_L$  to  $10 f_L$ ), linearly derate maximum input power by 13 dB.  
 \* Phase unbalance is 3 degrees max from  $f_L$  to  $3f_L$

CASE STYLE: M21

Connectors	Model	Price	Qty.
SMA	ZMSCJ-2-2	\$67.95	(1-9)
BRACKET (OPTION "B")		\$5.00	(1+)
BRACKET (OPTION "BR")		\$1.50	(1+)

## Outline Drawing

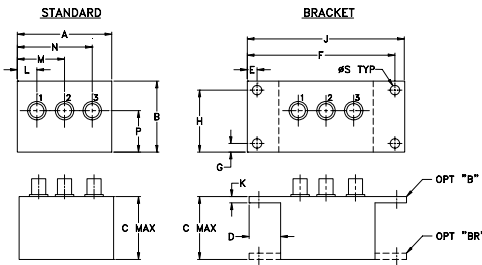

## Outline Dimensions (inch/mm)




A	B	C	D	E	F	G	H
1.50	1.13	1.00	.50	.155	2.345	.138	.987
38.10	28.70	25.40	12.70	3.94	59.56	3.51	25.07

J	K	L	M	N	P	S	wt
2.50	.10	.31	.75	1.19	.66	.150	grams
63.50	2.54	7.87	19.05	30.23	16.76	3.81	40.0

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
0.01	3.37	3.34	0.03	31.46	180.24	1.51	1.44	1.43
0.05	3.11	3.11	0.00	36.25	180.10	1.15	1.11	1.11
0.08	3.11	3.11	0.00	36.51	180.07	1.13	1.09	1.09
0.10	3.11	3.11	0.00	36.54	180.06	1.12	1.09	1.09
0.26	3.12	3.12	0.00	36.58	179.98	1.12	1.08	1.08
0.43	3.12	3.12	0.00	36.61	179.97	1.12	1.08	1.08
0.59	3.12	3.12	0.00	36.64	179.97	1.12	1.08	1.08
0.75	3.12	3.12	0.00	36.69	179.95	1.12	1.08	1.08
1.00	3.12	3.12	0.00	36.74	179.94	1.12	1.08	1.08
4.00	3.15	3.15	0.00	37.33	179.85	1.13	1.07	1.07
7.50	3.19	3.19	0.01	37.43	179.72	1.14	1.07	1.06
11.00	3.22	3.23	0.01	36.35	179.59	1.14	1.07	1.06
14.00	3.24	3.27	0.02	34.52	179.49	1.15	1.07	1.05
17.00	3.27	3.30	0.04	32.32	179.38	1.15	1.08	1.05
20.00	3.29	3.34	0.05	30.10	179.29	1.16	1.09	1.05

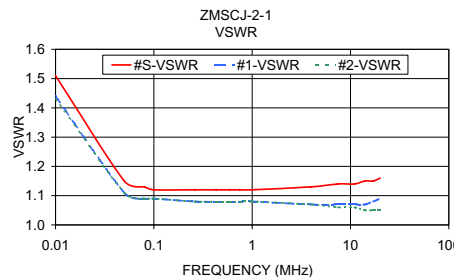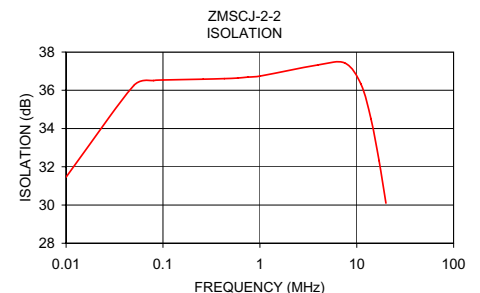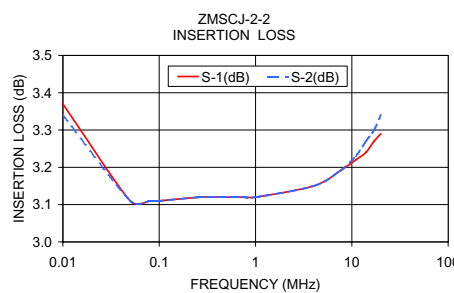

## electrical schematic



**Mini-Circuits®**  
 ISO 9001 ISO 14001 AS 9100 CERTIFIED

[minicircuits.com](http://minicircuits.com)

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

REV. OR  
 M94845  
 ZMSCJ-2-2  
 HY/TD/CP  
 070220