

Coaxial Power Splitter/Combiner

ZN4PD-272+

4 Way-0° 50Ω 500 to 2700 MHz



CASE STYLE: UU182

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	2.0W max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3
PORT 4	4

Outline Drawing



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
2.75	2.80	.63	.125	2.625	-	.125
69.85	71.12	16.00	3.18	66.68	-	3.18
H	J	K	L	M	wt	
1.38	.31	.500	.125	2.675	grams	
35.05	7.87	12.70	3.18	67.95	140	

Electrical Schematic



Features

- wideband, 500 to 2700 MHz
- rugged, shielded case
- power input up to 10W
- excellent amplitude unbalance, 0.2 dB typ.
- high isolation, 19 dB typ.
- low insertion loss, 0.9 dB typ.

Applications

- UHF
- cellular, GPS, PCS
- receivers/transmitters
- instrumentation
- CATV




Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		500	—	2700	MHz
Insertion Loss (above theoretical 6.0 dB)	500-1500	—	0.9	1.3	dB
	1500-2700	—	1.2	1.6	dB
Isolation	500-1500	15	25	—	dB
	1500-2700	15	22	—	dB
Phase Unbalance	500-1500	—	1.7	3	Degree
	1500-2700	—	3.1	6	Degree
Amplitude Unbalance	500-1500	—	0.2	0.8	dB
	1500-2700	—	0.4	0.8	dB
VSWR (Port S)	500-1500	—	1.2	1.65	dB
	1500-2700	—	1.4	1.7	dB
VSWR Output (Port 1-4)	500-1500	—	1.2	1.6	dB
	1500-2700	—	1.2	1.5	dB

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4					
500.00	6.47	6.39	6.43	6.43	0.08	23.59	24.14	23.26	1.31	1.09	1.06	1.08	1.08
600.00	6.58	6.50	6.54	6.54	0.08	26.15	30.21	25.40	1.45	1.19	1.16	1.18	1.19
700.00	6.56	6.48	6.52	6.52	0.08	34.58	36.61	32.52	1.35	1.25	1.23	1.25	1.25
800.00	6.50	6.43	6.48	6.47	0.07	30.54	30.71	32.46	1.14	1.23	1.21	1.24	1.24
900.00	6.54	6.48	6.53	6.51	0.06	23.01	27.13	23.83	1.12	1.16	1.16	1.19	1.18
1000.00	6.63	6.57	6.60	6.58	0.06	20.89	25.69	21.46	1.25	1.12	1.12	1.14	1.13
1200.00	6.68	6.62	6.62	6.59	0.09	21.44	26.38	21.61	1.10	1.13	1.12	1.10	1.11
1400.00	6.78	6.73	6.74	6.70	0.08	24.79	31.90	24.22	1.20	1.17	1.15	1.12	1.15
1600.00	6.81	6.75	6.78	6.73	0.08	28.41	44.23	27.98	1.16	1.18	1.17	1.16	1.17
1800.00	6.89	6.84	6.87	6.82	0.07	36.87	35.40	39.93	1.21	1.20	1.20	1.20	1.20
2000.00	6.93	6.89	6.91	6.86	0.08	24.42	33.93	24.06	1.11	1.05	1.07	1.07	1.07
2200.00	7.04	7.01	7.02	6.95	0.10	24.61	38.10	24.29	1.20	1.13	1.09	1.08	1.08
2300.00	7.07	7.04	7.06	6.97	0.10	27.19	41.93	27.38	1.19	1.12	1.10	1.09	1.10
2500.00	7.13	7.11	7.14	7.02	0.12	25.63	56.12	26.33	1.12	1.02	1.03	1.02	1.06
2600.00	7.17	7.16	7.20	7.06	0.14	23.50	39.56	24.05	1.12	1.07	1.03	1.07	1.06
2700.00	7.21	7.21	7.27	7.10	0.17	20.53	32.69	20.76	1.06	1.11	1.05	1.09	1.07
2700.00	7.21	7.21	7.27	7.10	0.17	20.53	32.69	20.76	1.06	1.11	1.05	1.09	1.07

1. Total Loss = Insertion Loss + 6dB splitter loss.

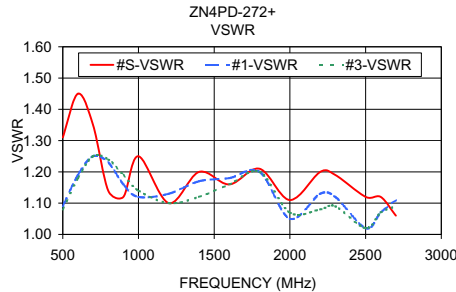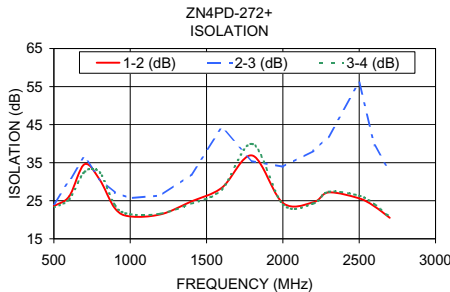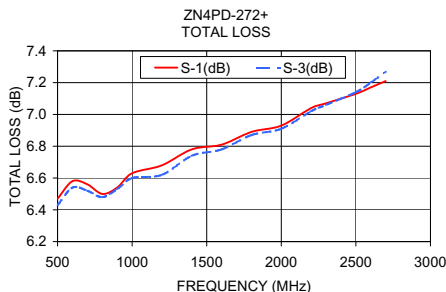

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

REV. OR
M135722
ZN4PD-272+
ED-14480/1
JC/CP/AM
120131