

Coaxial

Power Splitter/Combiner

ZSCJ-2-1+ ZSCJ-2-1

2 Way-180° 50Ω 1 to 200 MHz



CASE STYLE: M22

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	2
PORT 1	1
PORT 2	3

Features

- low insertion loss, 0.6 dB typ.
- high isolation, 35 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- rugged shielded case

Applications

- VHF
- signal processing
- radio communication

Connectors	Model	Price	Qty.
BNC	ZSCJ-2-1(+)	\$51.95	(1-9)
BRACKET	(OPTION "B")	\$5.00	(1+)
BRACKET	(OPTION "BR")	\$1.50	(1+)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f_L - f_U																		
1-200	35	30	35	25	30	23	0.75	1.0	0.6	0.8	0.75	1.2	2	2.5	4	0.3	0.15	0.3

L = low range [f_L to 10 f_L] M = mid range [10 f_L to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Outline Drawing

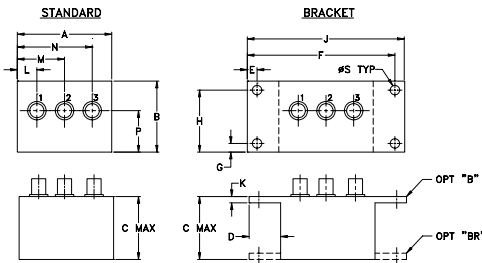




Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
2.25	1.38	1.24	.50	.150	3.100	.138	1.238
57.15	35.05	31.50	12.70	3.81	78.74	3.51	31.45

J	K	L	M	N	P	S	wt
3.25	.10	.40	1.15	1.86	.64	.150	grams
82.55	2.54	10.16	29.21	47.24	16.26	3.81	74.0

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1.00	3.79	3.78	0.01	33.86	179.88	1.28	1.50	1.50
3.00	3.54	3.53	0.01	34.60	180.07	1.16	1.39	1.40
5.00	3.48	3.47	0.01	34.85	180.13	1.12	1.36	1.36
8.00	3.45	3.43	0.02	35.03	179.80	1.09	1.35	1.35
20.00	3.44	3.42	0.02	35.32	179.63	1.06	1.34	1.34
29.00	3.46	3.43	0.02	35.54	179.55	1.07	1.34	1.34
38.00	3.47	3.45	0.02	35.76	179.33	1.09	1.34	1.34
47.00	3.49	3.46	0.03	36.09	179.15	1.11	1.35	1.34
60.00	3.53	3.49	0.04	36.65	179.00	1.13	1.35	1.34
75.00	3.51	3.48	0.03	37.29	178.67	1.13	1.35	1.34
90.00	3.51	3.46	0.06	38.11	178.40	1.14	1.35	1.34
120.00	3.62	3.53	0.09	39.86	178.03	1.23	1.35	1.33
160.00	3.60	3.45	0.15	39.23	177.31	1.26	1.36	1.33
180.00	3.72	3.53	0.19	37.47	177.20	1.32	1.36	1.33
200.00	3.74	3.55	0.19	35.21	176.99	1.35	1.36	1.32

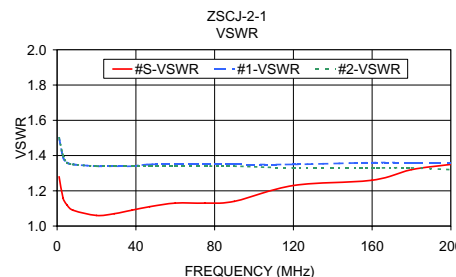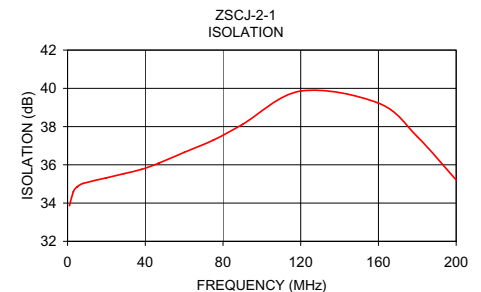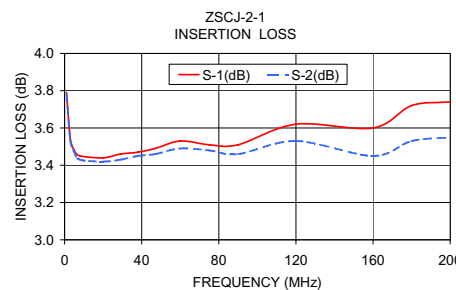

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

REV. A
M122492
ZSCJ-2-1
HY/TD/CP
090417

IF/RF MICROWAVE COMPONENTS