

Coaxial

# Power Splitter/Combiner

## ZX10-4A-14+

4 Way-0° 50Ω

1100 to 1450 MHz




### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	2.5W max.
Internal Dissipation	0.125W max.
Permanent damage may occur if any of these limits are exceeded.	

### Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3
PORT 4	4

### Outline Drawing

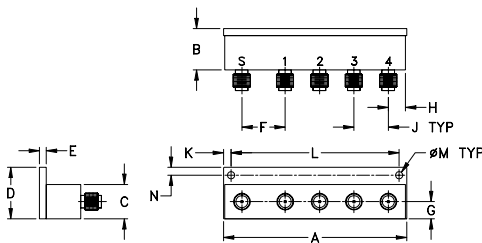

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
2.67	.60	.50	.75	.10	.63	.25	.25
67.82	15.24	12.70	19.05	2.54	16.00	6.35	6.35
J	K	L	M	N	wt.		
.50	.11	2.445	.106	.12	grams		
12.70	2.79	62.10	2.69	3.05	65.0		

### Features

- low insertion loss, 0.6 dB typ.
- high isolation, 25 dB typ.
- rigid unibody construction
- convenient for panel mount applications
- low cost
- very small size
- protected by US patent 6,790,049

### Applications




- antenna arrays
- signal distribution
- test bench

### Electrical Specifications (T<sub>AMB</sub>=25°C)

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 6 dB		PHASE UNBALANCE (Deg.)	AMPLITUDE UNBALANCE (dB)	INPUT VSWR (:1)	OUTPUT VSWR (:1)
	Typ.	Min.	Typ.	Max.	Max.	Max.	Typ.	Typ.
f <sub>L</sub> -f <sub>H</sub>								
1100-1450	25	16	0.6	1.0	4	0.7	1.25	1.2

### Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
1100.00	6.66	6.67	6.45	6.43	0.24	21.46	27.16	20.97	1.75	1.39	1.16	1.19	1.20	1.24
1125.00	6.65	6.67	6.44	6.41	0.26	23.02	27.85	22.45	1.88	1.37	1.16	1.19	1.20	1.24
1150.00	6.65	6.67	6.43	6.40	0.28	24.93	28.57	24.19	2.02	1.34	1.15	1.19	1.20	1.24
1190.00	6.64	6.68	6.42	6.37	0.31	29.17	29.81	27.90	2.19	1.30	1.15	1.19	1.20	1.24
1230.00	6.64	6.69	6.41	6.35	0.34	36.56	31.14	33.61	2.39	1.26	1.15	1.19	1.19	1.23
1250.00	6.64	6.70	6.41	6.34	0.36	39.49	31.84	36.67	2.47	1.24	1.14	1.19	1.19	1.23
1270.00	6.64	6.70	6.40	6.33	0.37	35.85	32.55	36.20	2.55	1.22	1.14	1.18	1.19	1.23
1290.00	6.65	6.71	6.40	6.32	0.39	31.81	33.28	32.91	2.64	1.21	1.13	1.18	1.19	1.23
1310.00	6.65	6.71	6.40	6.31	0.40	28.84	33.94	29.88	2.73	1.19	1.13	1.18	1.19	1.23
1330.00	6.65	6.72	6.40	6.31	0.41	26.60	34.56	27.49	2.81	1.18	1.13	1.18	1.19	1.22
1350.00	6.66	6.73	6.40	6.30	0.43	24.80	35.01	25.59	2.86	1.16	1.12	1.17	1.18	1.22
1370.00	6.66	6.74	6.41	6.30	0.44	23.33	35.23	24.01	2.95	1.15	1.12	1.16	1.18	1.22
1390.00	6.67	6.75	6.41	6.29	0.46	22.08	35.18	22.70	3.02	1.14	1.12	1.16	1.18	1.22
1430.00	6.69	6.77	6.42	6.28	0.49	20.07	34.20	20.60	3.12	1.12	1.12	1.17	1.18	1.22
1450.00	6.70	6.78	6.42	6.28	0.50	19.24	33.41	19.75	3.17	1.11	1.11	1.16	1.18	1.22

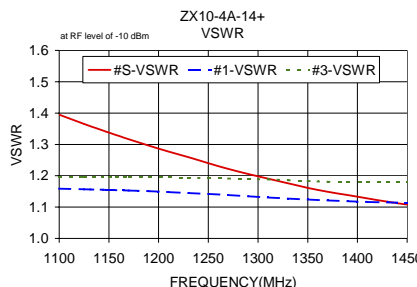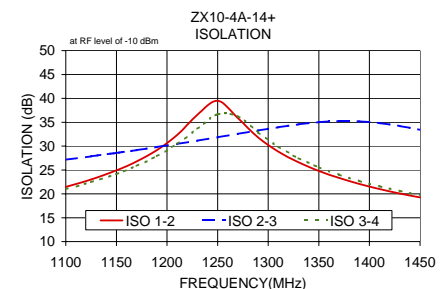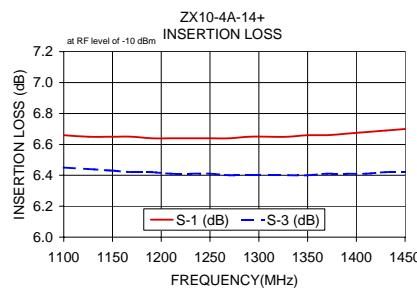

### electrical schematic



**Mini-Circuits®**  
 ISO 9001 ISO 14001 AS 9100 CERTIFIED  
 IFIRF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. OR  
 M95684  
 ZX10-4A-14+  
 ED-11601/2  
 AD/LC/CP  
 080225