

SMA Connectorized Power Splitter/Combiner

ZX10Q-2-25+ ZX10Q-2-25

2 Way-90° 50Ω 1350 to 2450 MHz

Maximum Ratings

| | |
|-----------------------------|----------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Power Input (as a splitter) | 20W* max. |

* Derate linearly to 7W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.


Coaxial Connections

| | |
|------------------------|---|
| INPUT PORT | 1 |
| PORT 1 (+90°) | 2 |
| PORT 2 (0°) | 3 |
| 50 OHM TERM EXTERNAL** | 4 |



** Recommended external termination
Mini-Circuits Part. No. ANNE-50L

Outline Drawing

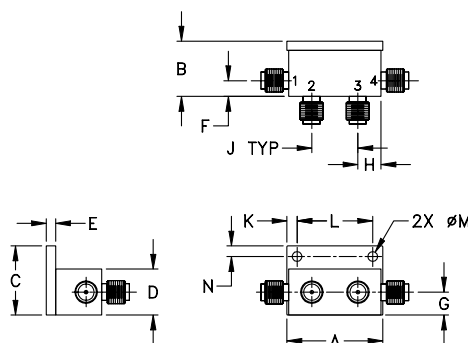

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | |
|-------|-------|-------|-------|------|------|-------|--|
| 1.04 | .60 | .75 | .50 | .10 | .17 | .25 | |
| 26.42 | 15.24 | 19.05 | 12.70 | 2.54 | 4.32 | 6.35 | |
| H | J | K | L | M | N | wt. | |
| .25 | .50 | .11 | .820 | .106 | .12 | grams | |
| 6.35 | 12.70 | 2.79 | 20.83 | 2.69 | 3.05 | 21.0 | |

Features

- low insertion loss, 0.4 dB typ.
- excellent amplitude unbalance
- very good phase unbalance
- small size
- low cost
- protected by U.S Patent 6,790,049

Applications




- GPS
- PCS/DCS
- UMTS
- balanced amplifiers
- modulators

Electrical Specifications (T_{AMB} = 25°C)


| FREQ. RANGE (MHz) | ISOLATION (dB) | | INSERTION LOSS (dB) Avg. of Coupled Outputs less 3 dB | | PHASE UNBALANCE (Degrees) | | AMPLITUDE UNBALANCE (dB) | |
|-------------------|----------------|------|--|------|---------------------------|------|--------------------------|------|
| | Typ. | Min. | Typ. | Max. | Typ. | Max. | Typ. | Max. |
| 1350-2450 | | | | | | | | |
| 1350-1950 | 25 | 18 | 0.4 | 0.7 | 1.0 | 5.0 | 0.5 | 1.1 |
| 1950-2200 | 25 | 19 | 0.4 | 0.7 | 1.0 | 4.0 | 0.5 | 1.0 |
| 2200-2450 | 25 | 17 | 0.6 | 0.9 | 1.0 | 4.0 | 0.5 | 1.1 |

Typical Performance Data

| Frequency (MHz) | Insertion Loss (dB) | | Amplitude Unbalance (dB) | Isolation (dB) | Phase Unbalance (deg.) | VSWR S | VSWR 1 | VSWR 2 |
|-----------------|---------------------|------|--------------------------|----------------|------------------------|--------|--------|--------|
| | S-1 | S-2 | | | | | | |
| 1275.00 | 2.95 | 3.83 | 0.88 | 21.24 | 88.32 | 1.19 | 1.20 | 1.18 |
| 1300.00 | 3.00 | 3.77 | 0.77 | 21.52 | 88.40 | 1.18 | 1.19 | 1.17 |
| 1400.00 | 3.17 | 3.56 | 0.38 | 22.67 | 88.67 | 1.15 | 1.16 | 1.14 |
| 1500.00 | 3.33 | 3.39 | 0.06 | 24.25 | 88.86 | 1.13 | 1.13 | 1.11 |
| 1600.00 | 3.45 | 3.26 | 0.20 | 26.05 | 88.99 | 1.11 | 1.10 | 1.09 |
| 1700.00 | 3.56 | 3.17 | 0.38 | 28.25 | 89.09 | 1.09 | 1.07 | 1.07 |
| 1800.00 | 3.63 | 3.12 | 0.50 | 30.93 | 89.14 | 1.08 | 1.05 | 1.05 |
| 1900.00 | 3.67 | 3.11 | 0.56 | 33.19 | 89.15 | 1.08 | 1.04 | 1.06 |
| 2000.00 | 3.67 | 3.14 | 0.53 | 33.29 | 89.15 | 1.08 | 1.04 | 1.07 |
| 2100.00 | 3.64 | 3.21 | 0.43 | 31.07 | 89.15 | 1.09 | 1.05 | 1.08 |
| 2200.00 | 3.58 | 3.33 | 0.25 | 28.67 | 89.17 | 1.11 | 1.08 | 1.10 |
| 2300.00 | 3.48 | 3.49 | 0.00 | 26.70 | 89.26 | 1.13 | 1.11 | 1.12 |
| 2400.00 | 3.35 | 3.69 | 0.35 | 25.09 | 89.34 | 1.16 | 1.14 | 1.16 |
| 2500.00 | 3.19 | 3.96 | 0.78 | 23.82 | 89.60 | 1.19 | 1.17 | 1.19 |
| 2550.00 | 3.10 | 4.13 | 1.03 | 23.23 | 89.77 | 1.21 | 1.19 | 1.21 |

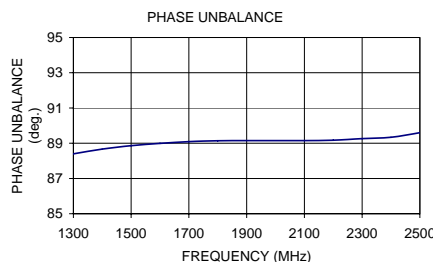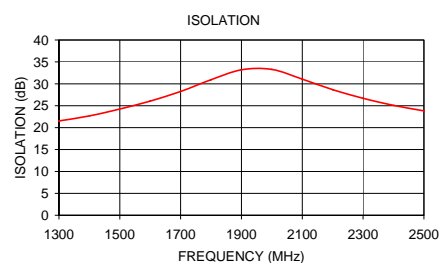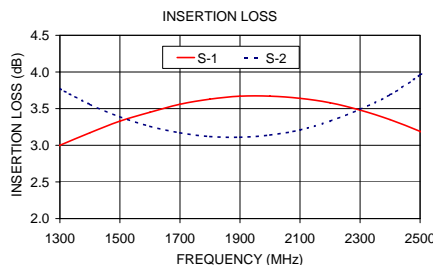

electrical schematic



For detailed performance specs & shopping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IFIRF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M114489
ZX10Q-2-25
AD/CP/AM
090824