

# Bandpass Filter

**ZX75BP-1842+**

50Ω      1725 to 1960 MHz

## The Big Deal

- Low Insertion Loss, 1.4 dB
- Excellent Rejection
  - 1450 MHz, 2350 MHz, 30 dB
  - 1350 MHz, 2560 MHz, 49 dB
- Rejection band extends to 7 GHz



CASE STYLE: HY1238

## Product Overview

The Mini-Circuits ZX75BP-1842+ ceramic coaxial resonator based filter offers outstanding close-in rejection in the PCS/DCS communication band. Built using Mini-Circuits proven unibody construction which integrates the RF connectors with the case body, the ZX75BP-1842+ takes very little space, and includes a multi-section low pass filter to prevent second harmonic re-entry that is characteristic of typical ceramic resonator filters.

## Key Features

Feature	Advantages
Outstanding close-in rejection	Using high Q ceramic resonators enables this filter to support applications where tight rejection performance is required.
Rejection band extended to 7 GHz	Integrated "clean up" low pass filter enables excellent rejection up to 7 GHz eliminates the need for additional external filters.
High Power Handling, 6W	Ability to withstand high power signals allows operation in many lab and integrated assembly applications, or for use in field applications as a quick-fix filter solution.
Excellent Temperature Stability	±0.35 dB insertion loss over the full temperature range.
Compact Versatile Case	Case Body: 1.2"x0.75"x0.46" With connectors and flanges: 2.05"x1.18"x0.46" Connectors: SMA Female (1), SMA Male (1)

# Bandpass Filter

50Ω 1725 to 1960 MHz

## ZX75BP-1842+



CASE STYLE: HY1238

SMA Connectors	Model	Price	Qty.
IN MALE OUT FEM	ZX75BP-1842-S+	\$59.95 ea.	(1-9)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	6W max. at 25°C

\* Derate linearly to 3W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

### Features

- Low Insertion loss, 1.4 dB typ.
- Minimal Insertion loss variation over temperature, ±0.35 dB
- Sharp stop band rejection
- Protected by US Patent 6,790,049


### Applications

- Harmonic & Sub-harmonic filtering
- Image rejection
- PCS/DCS

### Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency		—	1842	—	MHz	
	Insertion Loss	F1-F2	1725-1960	—	1.4	3.0	dB
	VSWR	F1-F2	1725-1960	—	—	2.0	:1
Stop Band, Lower	Insertion Loss	DC-F5	0.3-1350	40	—	—	dB
		F5-F3	1350-1450	20	—	—	dB
	VSWR	DC-F3	0.3-1450	—	30	—	:1
Stop Band, Upper	Insertion Loss	F4-F6	2350-2560	20	—	—	dB
		F6-F7	2560-2600	40	—	—	dB
		F7-F8	2600-7000	—	20	—	dB
	VSWR	F4-F8	2350-7000	—	10	—	:1


### Outline Drawing

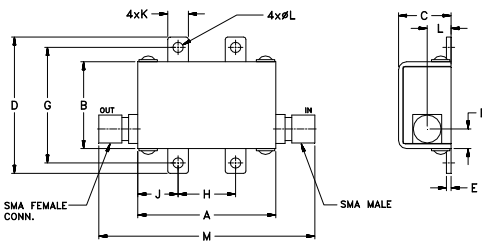


### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
1.20	.75	.46	1.18	.04	.17	1.00
30.48	19.05	11.68	29.97	1.02	4.32	25.40
H	J	K	L	M	wt	
.50	.35	.18	.106	2.05	grams	
12.70	8.89	4.57	2.69	52.07	35.00	

### Typical Frequency Response



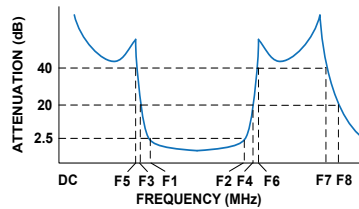


### Functional Schematic



### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR-IN (:1)	VSWR-OUT (:1)
0.30	92.61	1737.18	1737.18
500.00	70.30	102.19	66.82
1000.00	53.74	51.10	26.74
1350.00	50.38	48.26	22.58
1415.00	36.07	44.55	21.73
1450.00	29.80	40.41	20.95
1600.00	4.36	4.09	3.49
1725.00	1.49	1.54	1.55
1730.00	1.47	1.53	1.54
1842.00	1.32	1.31	1.34
1842.50	1.32	1.31	1.34
1960.00	1.67	1.49	1.37
1975.00	2.05	1.86	1.70
2015.00	4.24	3.94	3.34
2350.00	29.96	40.41	9.48
2480.00	40.52	48.26	6.94
2580.00	66.63	51.10	6.09
2600.00	55.89	52.65	6.05
4000.00	65.32	18.50	19.98
7000.00	34.84	3.18	33.42

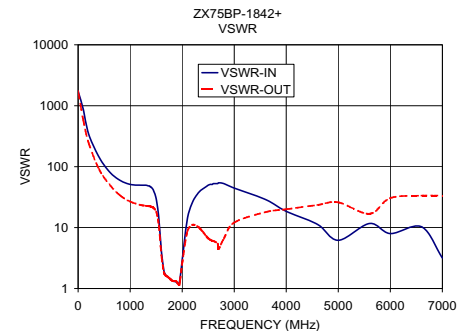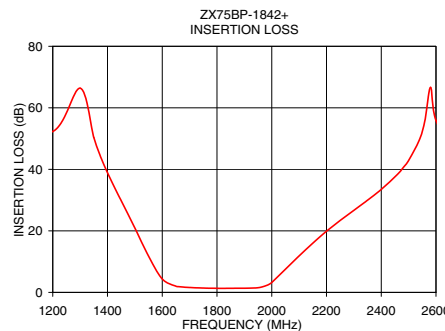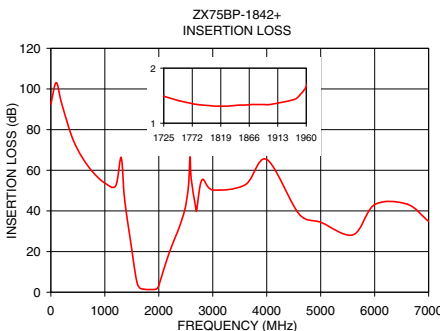

**Mini-Circuits**  
 ISO 9001 ISO 14001 AS 9100 CERTIFIED  
 IF/RF MICROWAVE COMPONENTS

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. OR  
 M125420  
 ZX75BP-1842+  
 EDU-1374  
 URJ/NY  
 100112  
 Page 2