

# Voltage Controlled Oscillator

## ZX95-4725+

Frequency Doubling 4585 to 4725 MHz

### Features

- Frequency based on multiplication of carrier frequency
- Low phase noise
- Low pulling
- Low pushing
- 5V tuning voltage range
- Protected by US patent 6,790,049



CASE STYLE: GB956

Connectors	Model	Price	Qty.
SMA	ZX95-4725-S+	\$54.95 ea.	(1-9)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

*The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.*

### Applications

- R&D
- LAB
- Instrumentation
- Wireless communications
- Point-to-point radio

### Electrical Specifications


MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)			PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER			
	F 2X(1/2F)			Typ.				VOLTAGE RANGE (V)	SENSI-TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)	Max.		F0.5	F1.5	F2			Typ.	Typ.	Vcc	Current
	Min.	Max.		1	10	100	1000															
ZX95-4725+	4585	4725	+2.5	-74	-104	-125	-144	0.5	5	73 - 92	17	80	-90	-25	-14	-25	2	4	5	30		

### Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7V
Absolute Max. Tuning Voltage (Vtune)	7V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

### Outline Drawing

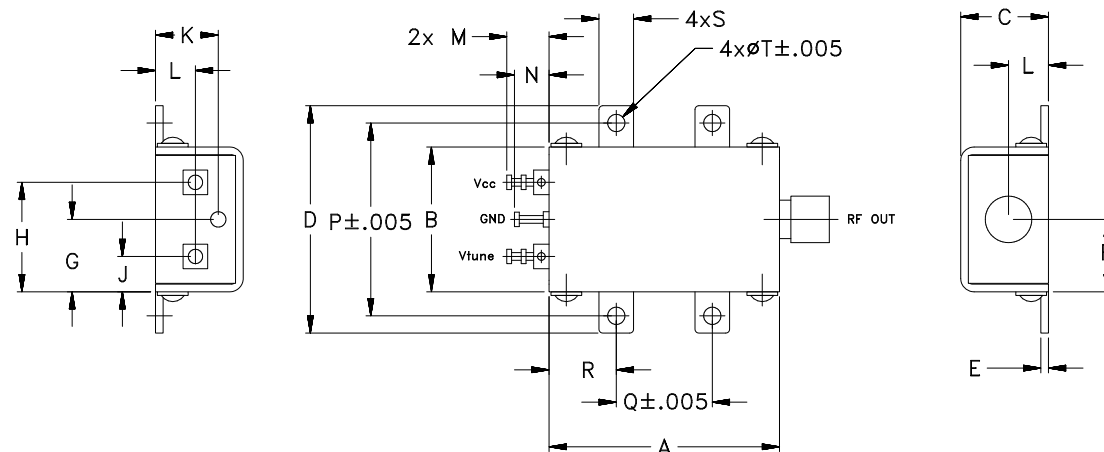

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	WT.
1.20	.75	.46	1.18	.04	.38	.45	.57	.18	.33	.21	.22	.18	1.00	.50	.35	.18	.106	GRAM
30.48	19.05	11.68	29.97	1.02	9.65	11.43	14.48	4.57	8.38	5.33	5.59	4.57	25.40	12.70	8.89	4.57	2.69	35.0



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).







REV. OR  
M118009  
EDR-8838F2  
ZX95-4725+  
RAV  
090906  
Page 1 of 2

# Performance Data & Curves\*

# ZX95-4725+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 4655 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F0.5	F1.5	F2			1kHz	10kHz	100kHz	1MHz		
0.00	74.77	4501.6	4486.0	4473.2	1.64	0.85	-0.11	19.42	-35.3	-21.8	-40.2	1.92	1.19	-76.5	-106.2	-127.4	-144.4	1.0	-73.83
0.25	70.70	4519.6	4504.7	4492.4	1.80	0.98	0.11	19.54	-35.4	-22.2	-44.3	2.30	2.13	-76.9	-105.6	-126.3	-143.4	2.0	-83.55
0.50	69.32	4537.0	4522.3	4510.3	2.04	1.21	0.31	19.65	-35.4	-23.5	-43.5	2.57	2.13	-76.5	-105.6	-127.1	-144.2	3.5	-91.09
0.75	69.50	4554.4	4539.7	4527.5	2.23	1.40	0.53	19.73	-35.3	-24.4	-47.0	2.81	1.22	-77.1	-105.9	-126.4	-143.8	6.0	-97.40
1.00	70.25	4571.8	4557.0	4544.7	2.35	1.57	0.73	19.80	-35.4	-24.8	-47.9	3.00	1.11	-76.4	-105.4	-127.0	-144.2	8.5	-101.85
1.25	71.31	4589.4	4574.6	4562.0	2.49	1.74	0.85	19.86	-35.7	-26.0	-50.8	3.15	2.21	-74.4	-105.1	-127.0	-144.2	10.0	-103.95
1.50	72.93	4607.3	4592.4	4579.6	2.72	1.89	1.01	19.91	-35.6	-27.1	-48.4	3.32	2.27	-75.4	-105.6	-126.8	-144.2	20.8	-111.39
1.75	75.20	4625.8	4610.7	4597.5	2.94	2.06	1.18	19.96	-35.5	-27.0	-55.8	3.48	1.44	-74.8	-104.5	-126.1	-144.1	35.5	-116.41
2.00	77.73	4644.9	4629.5	4616.0	3.15	2.26	1.32	19.98	-35.8	-28.7	-51.7	3.64	1.21	-74.4	-104.7	-126.2	-143.9	60.7	-121.23
2.25	81.01	4664.7	4648.9	4635.2	3.26	2.42	1.47	19.98	-36.2	-28.9	-60.1	3.77	2.46	-73.1	-103.6	-125.7	-143.7	86.7	-124.86
2.50	83.89	4685.2	4669.1	4655.1	3.32	2.60	1.58	19.95	-36.6	-30.1	-62.9	3.86	2.50	-73.5	-103.5	-125.9	-143.7	100.0	-125.78
2.75	85.88	4706.5	4690.1	4675.8	3.49	2.69	1.65	19.92	-36.6	-29.0	-54.6	3.83	1.13	-74.6	-103.3	-125.6	-143.7	148.1	-128.02
3.00	87.64	4728.3	4711.6	4697.1	3.59	2.74	1.69	19.87	-36.6	-31.0	-51.0	3.64	1.85	-73.6	-103.0	-126.0	-145.9	177.0	-129.10
3.25	88.76	4750.7	4733.5	4718.9	3.68	2.83	1.74	19.80	-36.6	-28.3	-48.7	3.21	2.66	-73.4	-103.6	-125.9	-144.5	211.6	-129.32
3.50	88.71	4773.3	4755.7	4741.0	3.76	2.91	1.72	19.71	-36.8	-29.5	-47.0	2.57	1.73	-71.9	-102.0	-125.5	-144.6	302.4	-130.91
3.75	86.11	4795.4	4777.9	4763.2	3.74	2.98	1.70	19.62	-36.6	-25.8	-44.1	1.68	1.59	-70.9	-101.5	-124.9	-144.1	361.5	-133.12
4.00	82.80	4817.0	4799.4	4785.2	3.63	2.98	1.66	19.53	-36.9	-24.4	-42.6	0.72	2.73	-72.8	-101.7	-124.4	-143.0	507.5	-137.29
4.25	78.64	4837.7	4820.1	4806.4	3.57	2.80	1.61	19.43	-36.9	-22.5	-40.1	0.15	1.90	-70.7	-99.5	-123.1	-142.3	606.7	-139.92
4.50	73.54	4857.3	4839.8	4826.4	3.50	2.68	1.32	19.31	-37.0	-19.8	-39.2	0.88	0.93	-68.9	-99.7	-122.1	-140.7	851.6	-142.65
5.00	58.82	4891.6	4874.7	4862.1	3.22	2.52	1.00	19.11	-37.0	-16.2	-37.4	1.42	2.39	-68.8	-99.0	-121.1	-142.1	1000.0	-143.72

\*at 25°C unless mentioned otherwise

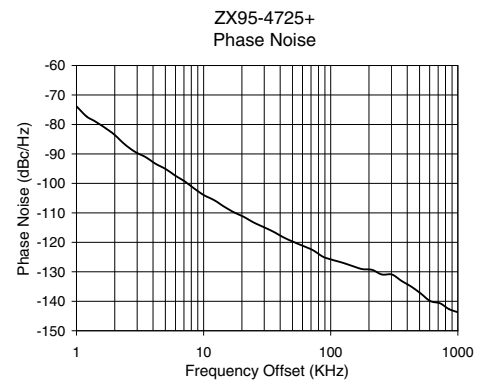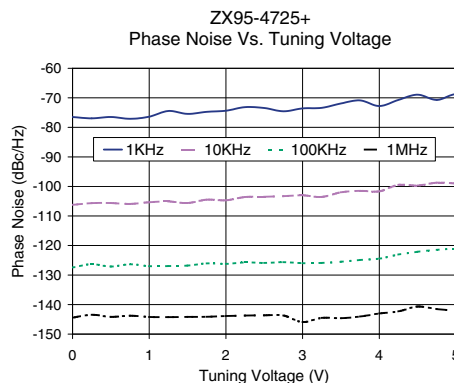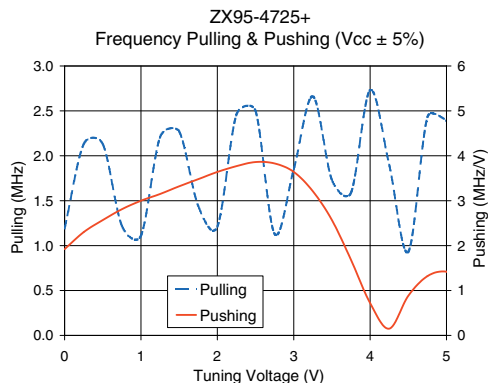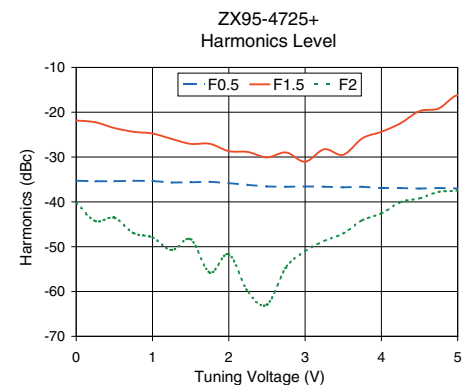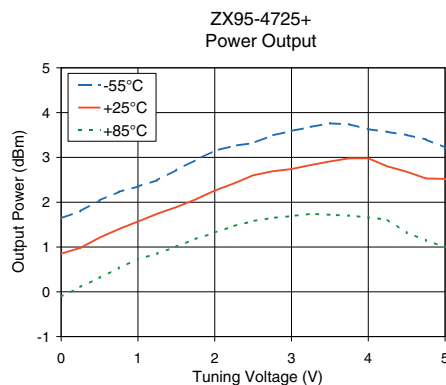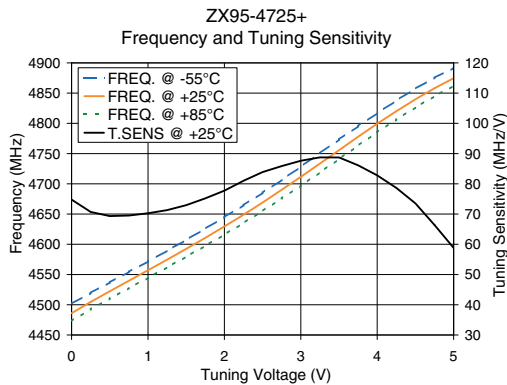

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).