

Coaxial

Voltage Controlled Oscillator

ZX95-5400+

Linear Tuning 4300 to 5400 MHz

Features

- Linear tuning characteristics
- Low harmonics, -30dBc typ.
- Low pulling
- Low pushing
- Protected by US patent 6,790,049

Applications

- R&D
- LAB
- Instrumentation
- Wireless communications
- Point-to-Point



CASE STYLE: GB956

| Connectors | Model | Price | Qty. |
|------------|--------------|-------------|-------|
| SMA | ZX95-5400-S+ | \$40.95 ea. | (1-9) |

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications


| MODEL NO. | FREQ. (MHz) | | POWER OUTPUT (dBm) | PHASE NOISE dBc/Hz SSB at offset frequencies, kHz | | | | TUNING | | | | | NON HARMONIC SPURIOUS (dBc) | HARMONICS (dBc) | | PULLING pk-pk @ 12 dB (MHz) | PUSHING (MHz/V) | DC OPERATING POWER | | | | |
|------------|-------------|------|--------------------|---|-----|------|------|-------------------|---------------------|---------------|---------------------------------|------|-----------------------------|-----------------|------|-----------------------------|-----------------|--------------------|------|------|-------------|--------------|
| | Min. | Max. | | Typ. | | | | VOLTAGE RANGE (V) | SENSITIVITY (MHz/V) | PORT CAP (pF) | 3 dB MODULATION BANDWIDTH (MHz) | | | Typ. | Typ. | | | Max. | Typ. | Typ. | Vcc (volts) | Current (mA) |
| | | | | 1 | 10 | 100 | 1000 | Min. | Max. | Typ. | Typ. | Typ. | | Typ. | Max. | | | Typ. | Typ. | Max. | | |
| ZX95-5400+ | 4300 | 5400 | -1.3 | -58 | -83 | -105 | -126 | 0.5 | 19 | 95-135 | 20 | 95 | -90 | -30 | -15 | 7 | 10 | 5 | 30 | | | |

Maximum Ratings

| | |
|--------------------------------------|----------------|
| Operating Temperature | -55°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Absolute Max. Supply Voltage (Vcc) | 6.5V |
| Absolute Max. Tuning Voltage (Vtune) | 21.0V |
| All specifications | 50 ohm system |

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

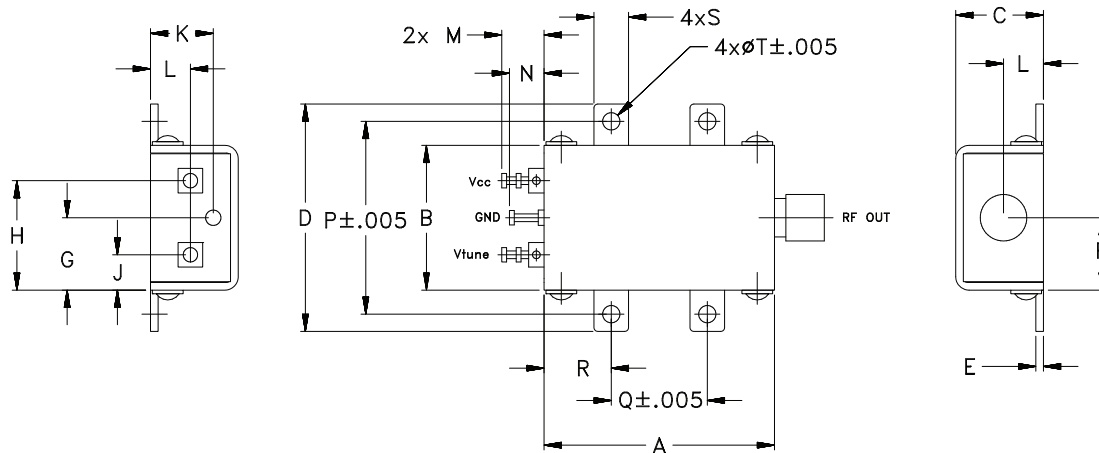

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J | K | L | M | N | P | Q | R | S | T | WT. |
|-------|-------|-------|-------|------|------|-------|-------|------|------|------|------|------|-------|-------|------|------|------|------|
| 1.20 | .75 | .46 | 1.18 | .04 | .38 | .45 | .57 | .18 | .33 | .21 | .22 | .18 | 1.00 | .50 | .35 | .18 | .106 | GRAM |
| 30.48 | 19.05 | 11.68 | 29.97 | 1.02 | 9.65 | 11.43 | 14.48 | 4.57 | 8.38 | 5.33 | 5.59 | 4.57 | 25.40 | 12.70 | 8.89 | 4.57 | 2.69 | 35.0 |



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.







REV. OR
M125166
EDR-8985F2
ZX95-5400+
RAV
091115
Page 1 of 2

Performance Data & Curves*

ZX95-5400+

| V TUNE | TUNE SENS (MHz/V) | FREQUENCY (MHz) | | | POWER OUTPUT (dBm) | | | Icc (mA) | HARMONICS (dBc) | | | FREQ. PUSH (MHz/V) | FREQ. PULL (MHz) | PHASE NOISE (dBc/Hz) at offsets | | | | FREQ OFFSET (KHz) | PHASE NOISE at 4850 MHz (dBc/Hz) |
|--------|-------------------|-----------------|--------|--------|--------------------|-------|-------|----------|-----------------|-------|-------|--------------------|------------------|---------------------------------|-------|--------|--------|-------------------|----------------------------------|
| | | -55°C | +25°C | +85°C | -55°C | +25°C | +85°C | | F2 | F3 | F4 | | | 1kHz | 10kHz | 100kHz | 1MHz | | |
| 0.00 | 72.56 | 4039.4 | 4031.0 | 4065.5 | 0.84 | -0.55 | -2.45 | 22.38 | -23.2 | -35.8 | -38.0 | 2.33 | 8.07 | -61.9 | -87.1 | -108.6 | -128.8 | 1.0 | -58.43 |
| 0.50 | 61.47 | 4074.8 | 4067.3 | 4099.8 | 0.94 | -0.42 | -2.38 | 22.36 | -23.4 | -34.7 | -39.7 | 2.06 | 7.04 | -62.4 | -86.8 | -107.9 | -128.2 | 2.0 | -65.90 |
| 1.00 | 55.88 | 4104.7 | 4098.0 | 4127.2 | 1.04 | -0.40 | -2.34 | 22.40 | -23.8 | -35.1 | -38.1 | 1.19 | 8.13 | -64.2 | -88.8 | -110.3 | -130.3 | 3.5 | -71.91 |
| 2.50 | 77.59 | 4202.9 | 4195.3 | 4225.0 | 0.95 | -0.47 | -2.47 | 22.32 | -24.6 | -40.7 | -41.6 | 0.05 | 13.36 | -62.7 | -86.9 | -108.1 | -128.4 | 6.0 | -77.84 |
| 3.00 | 102.33 | 4241.4 | 4234.1 | 4267.0 | 0.79 | -0.71 | -2.54 | 22.25 | -24.9 | -38.5 | -42.9 | 0.74 | 7.21 | -61.9 | -87.6 | -107.9 | -128.2 | 8.5 | -81.38 |
| 4.00 | 123.63 | 4341.7 | 4334.2 | 4357.8 | 0.20 | -1.28 | -2.79 | 22.08 | -26.7 | -35.8 | -46.1 | 5.06 | 10.59 | -61.0 | -84.1 | -105.9 | -126.2 | 10.0 | -83.16 |
| 5.00 | 130.46 | 4469.4 | 4456.5 | 4471.8 | -0.27 | -1.65 | -2.89 | 21.91 | -29.5 | -43.9 | -55.5 | 10.15 | 10.03 | -57.5 | -82.4 | -104.1 | -124.5 | 20.8 | -90.66 |
| 6.00 | 122.67 | 4601.0 | 4589.4 | 4596.0 | -0.36 | -1.59 | -2.80 | 21.85 | -30.6 | -40.2 | -54.0 | 10.59 | 8.13 | -57.1 | -83.0 | -105.3 | -125.6 | 35.5 | -95.83 |
| 7.00 | 121.99 | 4726.6 | 4715.3 | 4717.2 | -0.37 | -1.44 | -2.62 | 21.90 | -32.4 | -36.7 | -52.1 | 10.44 | 10.28 | -57.0 | -83.5 | -106.0 | -126.6 | 60.7 | -100.87 |
| 7.50 | 115.65 | 4790.4 | 4776.3 | 4775.1 | -0.17 | -1.53 | -2.70 | 21.88 | -33.7 | -33.8 | -54.0 | 12.78 | 10.35 | -57.2 | -83.1 | -104.4 | -125.1 | 86.7 | -104.15 |
| 8.00 | 121.63 | 4847.4 | 4834.1 | 4832.1 | -0.36 | -1.30 | -2.40 | 21.96 | -33.6 | -34.1 | -55.5 | 11.16 | 4.70 | -58.0 | -82.6 | -105.9 | -126.6 | 100.0 | -105.32 |
| 9.00 | 114.31 | 4963.4 | 4947.7 | 4941.8 | -0.27 | -1.24 | -2.29 | 22.01 | -33.8 | -47.1 | -54.6 | 12.55 | 10.18 | -56.3 | -82.5 | -105.5 | -126.0 | 148.1 | -109.07 |
| 10.00 | 110.92 | 5071.6 | 5055.5 | 5046.1 | -0.05 | -1.00 | -1.96 | 22.07 | -33.4 | -40.0 | -54.7 | 12.69 | 4.49 | -57.2 | -82.1 | -105.0 | -125.7 | 177.0 | -110.67 |
| 12.00 | 107.29 | 5292.6 | 5268.9 | 5249.4 | -0.61 | -1.25 | -1.90 | 22.23 | -36.4 | -29.1 | -44.8 | 10.44 | 7.95 | -60.3 | -82.8 | -106.2 | -126.9 | 211.6 | -112.31 |
| 13.00 | 102.20 | 5397.6 | 5371.0 | 5348.3 | -0.62 | -1.49 | -2.12 | 22.35 | -40.5 | -34.8 | -51.6 | 11.98 | 9.33 | -58.2 | -82.1 | -104.8 | -125.9 | 302.4 | -115.44 |
| 13.50 | 96.82 | 5446.0 | 5422.1 | 5397.5 | -0.12 | -1.03 | -2.18 | 22.46 | -42.7 | -37.0 | -53.2 | 10.75 | 5.03 | -57.3 | -83.2 | -106.0 | -127.0 | 361.5 | -117.13 |
| 15.00 | 91.83 | 5589.5 | 5562.3 | 5534.1 | 0.33 | -0.38 | -1.09 | 22.79 | -43.7 | -38.8 | -54.7 | 10.84 | 4.86 | -55.7 | -83.8 | -106.3 | -127.4 | 507.5 | -120.10 |
| 16.00 | 82.61 | 5678.5 | 5649.8 | 5619.0 | 0.53 | 0.13 | -0.75 | 23.01 | -39.5 | -42.6 | -53.7 | 12.46 | 3.64 | -55.1 | -82.5 | -105.3 | -126.7 | 606.7 | -121.75 |
| 18.00 | 73.00 | 5837.2 | 5805.1 | 5769.2 | 1.28 | 0.22 | -0.08 | 23.50 | -34.2 | -46.6 | -53.6 | 14.89 | 5.07 | -54.7 | -81.0 | -104.3 | -125.3 | 851.6 | -124.71 |
| 19.00 | 65.54 | 5905.5 | 5872.7 | 5837.4 | 0.80 | 0.64 | 0.07 | 23.82 | -33.1 | -50.1 | -52.8 | 14.02 | 5.93 | -54.8 | -81.9 | -104.8 | -126.1 | 1000.0 | -125.89 |

*at 25°C unless mentioned otherwise

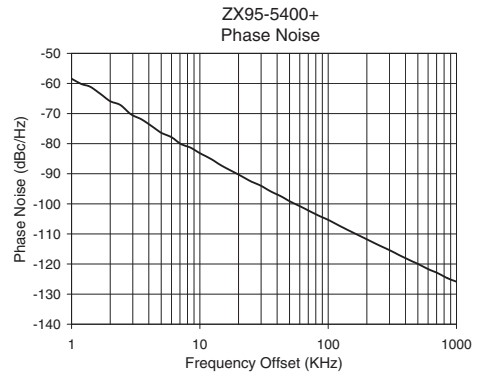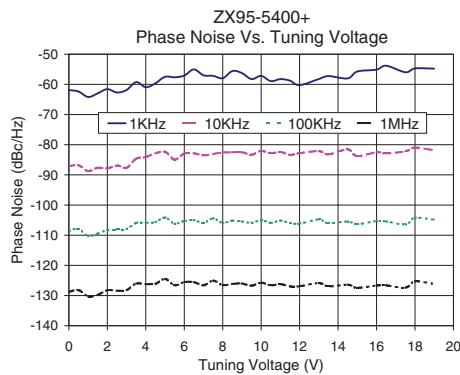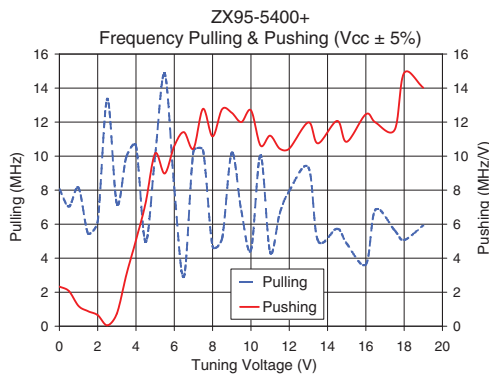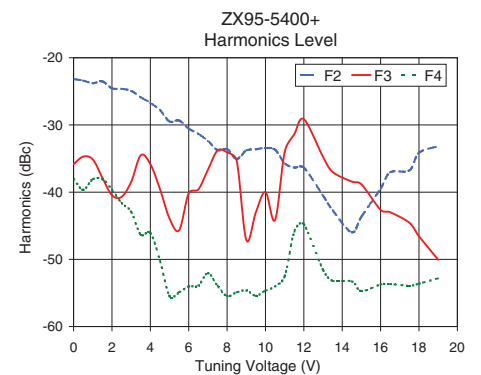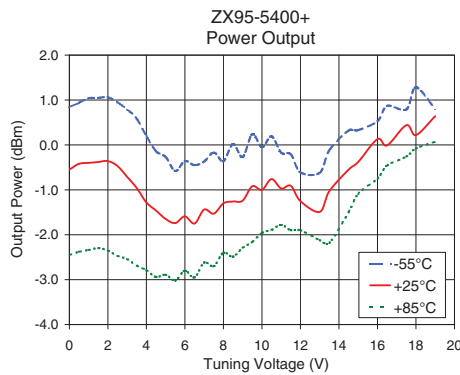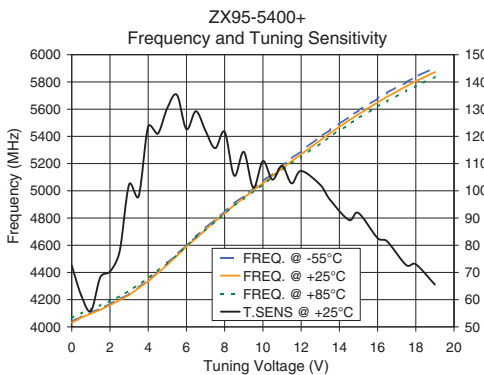

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.