

Ceramic

# Dual Low Pass Filter

**DLFCV-1000+**

**50Ω DC to 1000 MHz**



CASE STYLE: JV1210C-1

## The Big Deal

- Low insertion loss
- Fast roll off
- Small size
- Dual filter in 1210 package

## Product Overview

DLFCV-1000+ is a dual low pass filter which can also operate as a balanced input /output low pass filter in LTCC package. This filter has faster roll and offers low insertion loss, low VSWR and high power handling.

## Key Features

Feature	Advantages
Faster roll off	DLFCV-1000+ is a dual low pass filter in LTCC package with 7 sections hence the roll off is faster.
Power handling	Each filter can handle 8.5W power.
Dual filter	Dual Filter in 1210 package, LTCC construction.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

# Dual Low Pass Filter

# DLFCV-1000+

50Ω DC to 1000 MHz



CASE STYLE: JV1210C-1

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings


Operating Temperature	-40° to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	8.5W Max. at 25°C

\* Passband rating, derate linearly to 3.5W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

RF IN1, RF IN2	1, 6
RF OUT1, RF OUT2	3, 4
GROUND	2, 5

### Outline Drawing

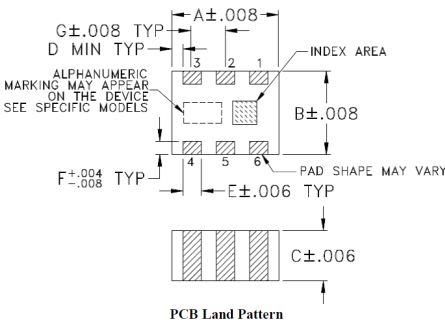


### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.126	.098	.059	.004	.022	.016	.039
3.2	2.5	1.50	.1	.56	.4	1.0
H	J	K	L	M	WT. GRAMS	
-	-	.177	.024	.059	.03	
-	-	4.5	.6	1.5		

### Demo Board MCL P/N: TB-867+ Suggested PCB Layout (PL-483)

SUGGESTED MOUNTING CONFIGURATION FOR JV1210C-1 CASE STYLE "08F108" PIN CODE

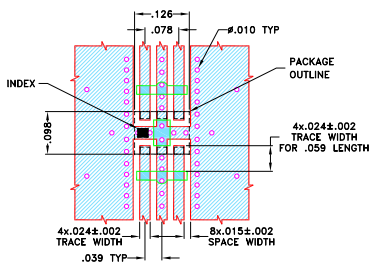

- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .010"±.001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
  - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- Low insertion loss
- Small size
- Excellent return loss
- High rejection

### Applications


- Military Applications
- VHF/UHF transmitters/receivers
- Harmonic rejection
- Output of the A/D converter

### Electrical Specifications<sup>(1,2)</sup> at 25°C


	Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-1000	—	1.2	2.2	dB
	Freq. Cut-Off	1280	—	3.0	—	dB
	Amp Unbalance	DC-1000	—	0.1	—	dB
	Pha Unbalance	DC-1000	—	3	—	deg
	VSWR	DC-1000	—	1.4	—	:1
Stop Band	Insertion Loss	1700-5000	24	27	—	dB
	Cross Over Isolation	1700-5000	—	27	—	dB
	VSWR	1700-5000	—	20	—	:1

- (1) In Application where DC voltage is present at either input or output ports, coupling capacitors are required.  
 (2) Measured on Mini-Circuits Characterization Test Board TB-867+.

### Typical Frequency Response






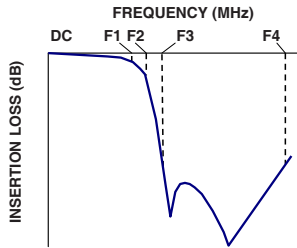


### Functional Schematic

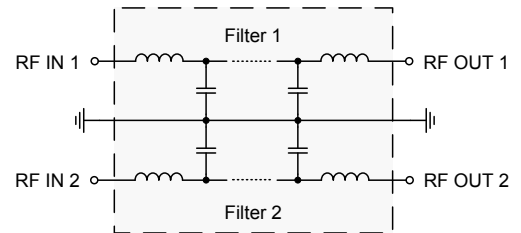

### Typical Performance Data at 25°C




Freq. (MHz)	Insertion Loss		Cross Over Isolation (dB)	VSWR		Freq. (MHz)	Amp Unbal. (dB)	Phase Unbal. (deg)	Group Delay	
	Filter1 (dB)	Filter2 (dB)		Filter1 (:1)	Filter2 (:1)				Filter1 (ns)	Filter2 (ns)
1.0	0.03	0.03	86.58	1.01	1.01	1.0	0.01	0.01	0.56	0.57
30.0	0.07	0.07	56.46	1.01	1.01	40.0	0.01	0.02	0.58	0.58
100.0	0.13	0.12	45.96	1.04	1.03	60.0	0.01	0.05	0.58	0.58
250.0	0.24	0.23	38.21	1.10	1.10	100.0	0.01	0.09	0.58	0.58
500.0	0.43	0.42	33.11	1.25	1.25	140.0	0.00	0.16	0.58	0.58
1000.0	1.00	1.05	30.36	1.46	1.54	200.0	0.01	0.24	0.58	0.58
1280.0	3.02	3.16	36.44	2.26	2.24	260.0	0.01	0.34	0.58	0.58
1400.0	10.79	12.85	30.56	3.93	4.25	300.0	0.01	0.38	0.59	0.59
1450.0	19.29	22.21	32.88	3.32	3.57	340.0	0.01	0.44	0.59	0.59
1500.0	33.50	35.73	38.85	3.17	3.43	460.0	0.02	0.64	0.61	0.61
1600.0	46.20	40.97	59.38	7.08	7.08	480.0	0.02	0.69	0.61	0.61
1700.0	46.78	45.32	65.50	12.88	12.65	500.0	0.02	0.73	0.61	0.62
1760.0	54.70	53.12	64.01	15.97	15.76	540.0	0.02	0.82	0.62	0.63
1800.0	49.27	47.00	63.58	17.81	17.63	600.0	0.02	0.93	0.64	0.64
1900.0	39.91	38.63	62.98	21.53	21.49	660.0	0.03	1.06	0.66	0.66
2000.0	36.56	35.71	62.46	24.14	24.28	700.0	0.03	1.20	0.67	0.68
2100.0	35.21	34.62	61.91	25.84	26.18	740.0	0.03	1.31	0.69	0.70
2500.0	36.38	36.82	73.40	29.38	30.26	800.0	0.03	1.55	0.72	0.73
3000.0	41.95	45.22	49.35	31.71	32.81	840.0	0.03	1.77	0.75	0.76
3400.0	43.88	50.90	42.63	32.46	34.79	900.0	0.04	2.11	0.80	0.81
4000.0	39.49	45.49	36.75	31.05	35.32	960.0	0.06	2.48	0.86	0.87
5000.0	33.10	37.01	31.76	27.23	31.28	1000.0	0.07	2.81	0.90	0.91

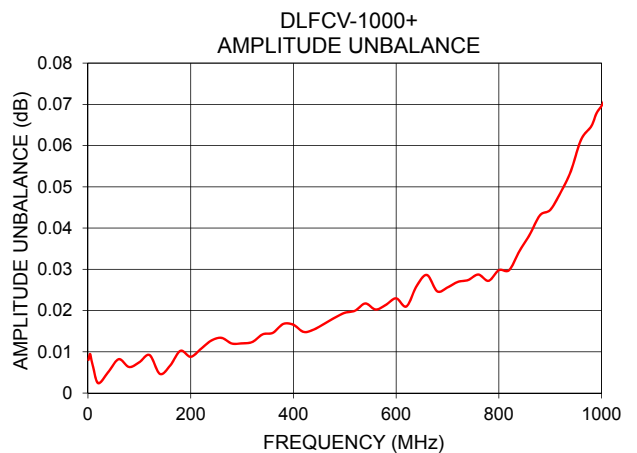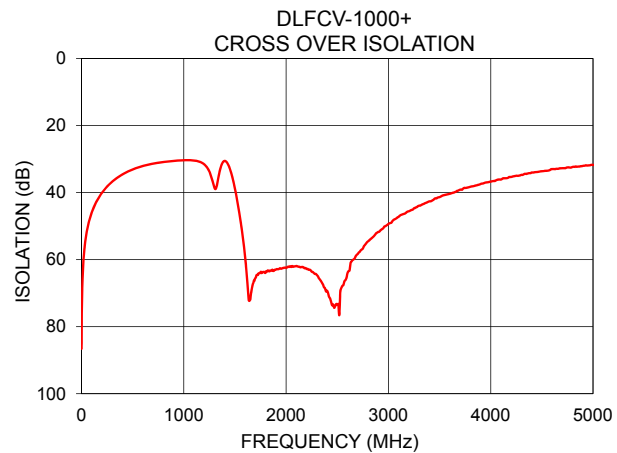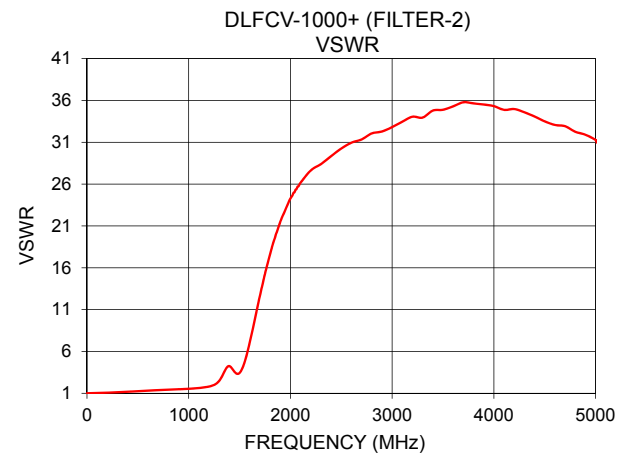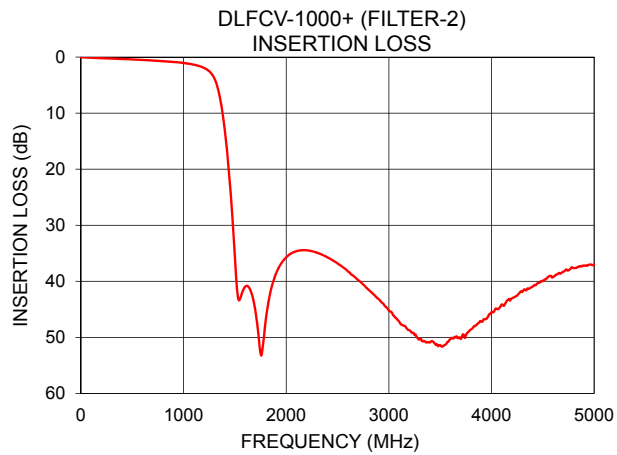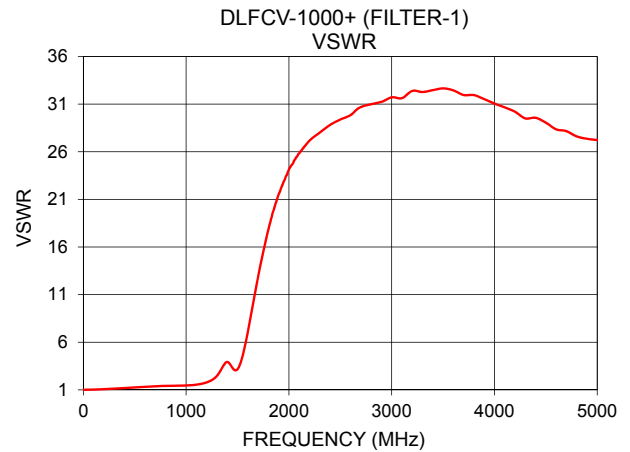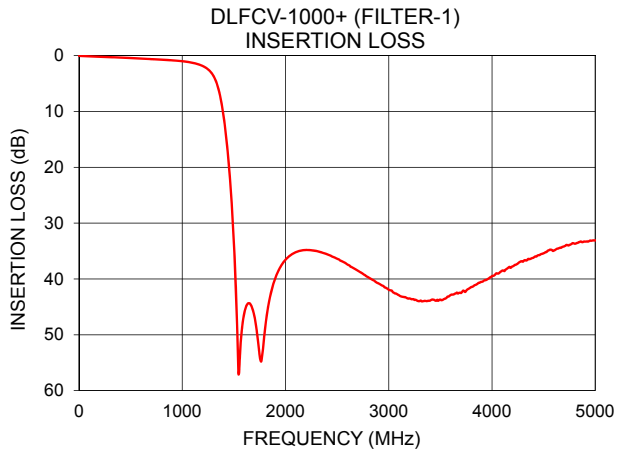

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



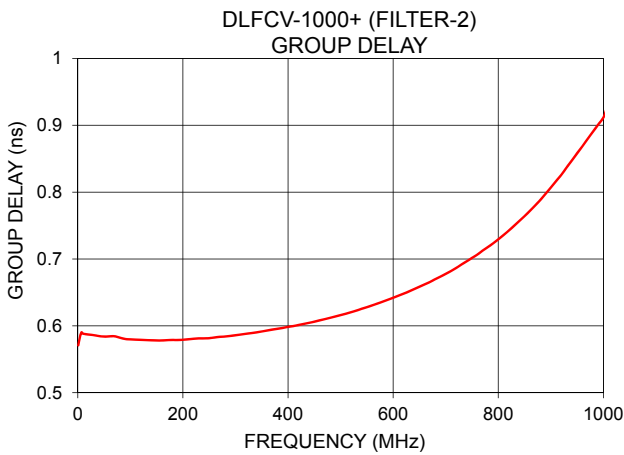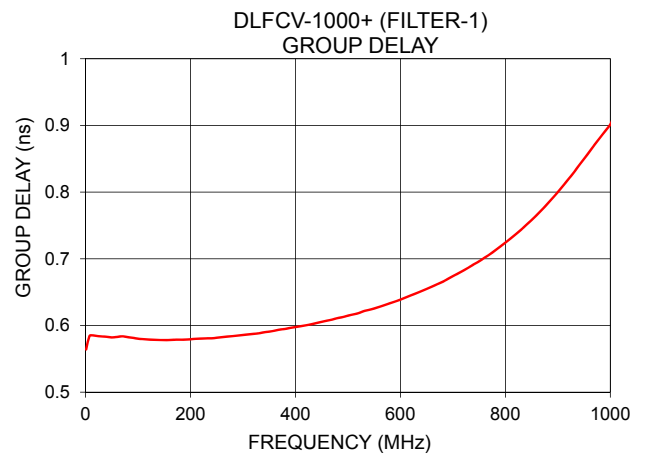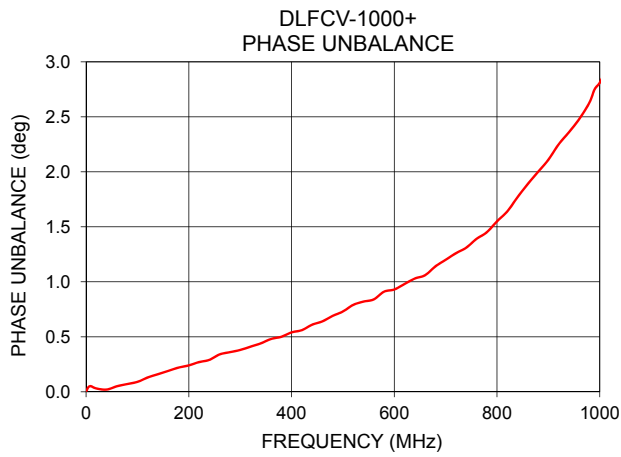

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

