

# High IP3 Frequency Mixer

Level17 (LO Power +17dBm) 1430 to 1650 MHz

## HJK-1651H+



CASE STYLE: TTT881  
PRICE: \$9.95 ea. QTY (10)

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
LO Power	+20 dBm
RF Power	+20 dBm

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

LO	2
RF	1
IF	3
GROUND	4,5,6

### Features

- very high IP3, 32 dBm typ.
- excellent L-R isolation, 45 dB typ.; L-I isolation, 32 dB typ.
- compression, 3 dB higher than LO power
- protected by US Patent 6,807,407


### Applications

- aeronautical communication
- differential GPS
- fixed satellite
- mobile satellite
- geostationary mobile

### Electrical Specifications at 25°C

Parameter	Min.	Typ.	Max.	Unit
Frequency Range, RF	1430		1650	MHz
Frequency Range, LO	1520	—	1740	MHz
Frequency Range, IF	10	—	300	MHz
Conversion Loss	—	7.3	8.3	dB
LO to RF Isolation	35	45	—	dB
LO to IF Isolation	24	32	—	dB
IP3	—	32	—	dBm
RF Input Power at 1 dB Compression	—	+20	—	dBm

### Outline Drawing

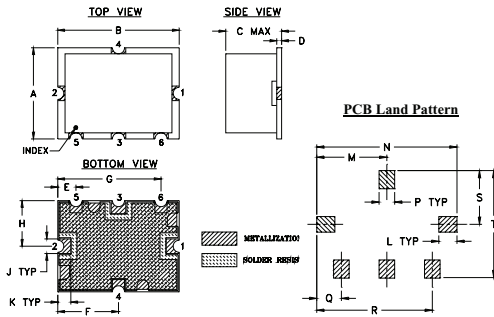


Suggested Layout,  
Tolerance to be within ±.002

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27
L	M	N	P	Q	R	S	T	wt.	
.070	.270	.540	.060	.095	.445	.208	.415	grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8	

### Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

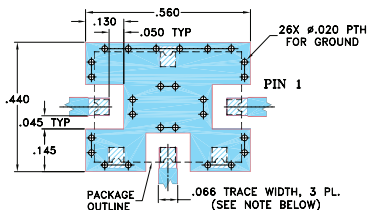


#### NOTE:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .039" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.

### Typical Performance Data

Frequency RF MHz	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)		IP3 (dBm)
					LO	LO	
1430.00	7.14	47.79	31.97	1.42	1.85	30.22	
1440.00	7.08	47.17	31.70	1.39	1.79	31.18	
1450.00	7.07	47.12	31.60	1.39	1.73	31.59	
1460.00	7.02	47.17	31.69	1.38	1.67	32.20	
1480.00	6.97	47.75	31.92	1.39	1.55	32.20	
1500.00	7.01	46.48	31.92	1.38	1.43	31.94	
1520.00	7.13	45.39	32.04	1.37	1.34	33.16	
1530.00	7.22	45.50	32.03	1.38	1.30	33.71	
1538.00	7.27	45.31	32.15	1.39	1.28	34.08	
1540.00	7.28	45.26	32.21	1.39	1.28	34.15	
1544.00	7.28	45.08	32.35	1.40	1.27	33.68	
1560.00	7.21	44.51	32.98	1.40	1.26	32.73	
1590.00	7.24	44.81	33.72	1.39	1.31	32.03	
1605.00	7.26	44.64	34.20	1.38	1.36	32.23	
1635.00	7.33	45.43	35.26	1.41	1.46	31.11	
1650.00	7.32	45.23	35.92	1.39	1.52	30.80	

### Electrical Schematic

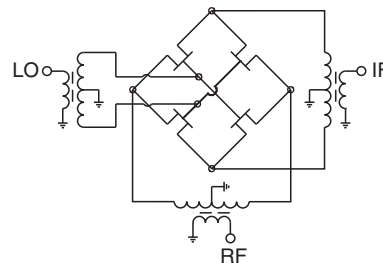








**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED  
IF/RF MICROWAVE COMPONENTS

For detailed performance specs  
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine [minicircuits.com](http://www.minicircuits.com) Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. OR  
M137921  
HJK-1651H+  
ED-14444  
WL/CP/AM  
120713  
Page 2 of 3

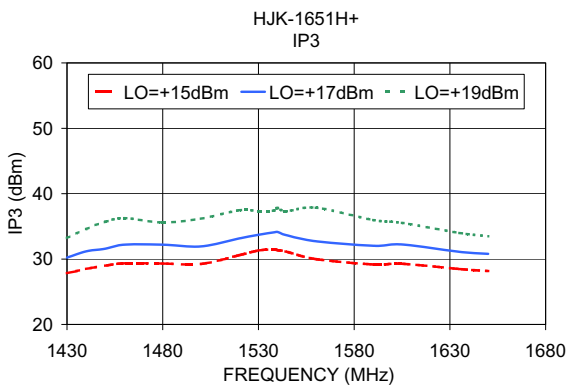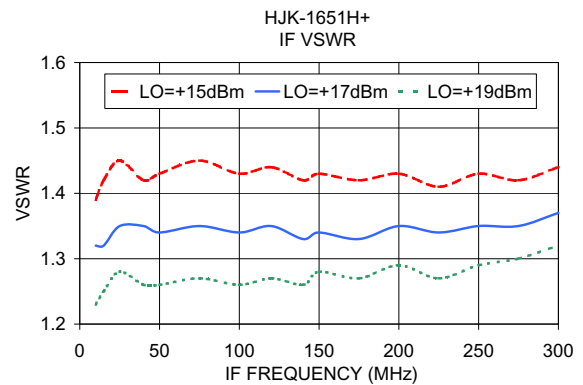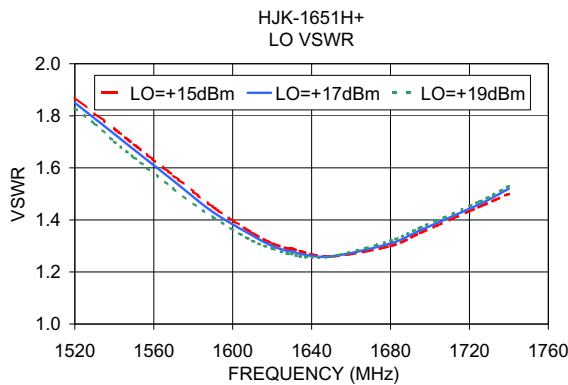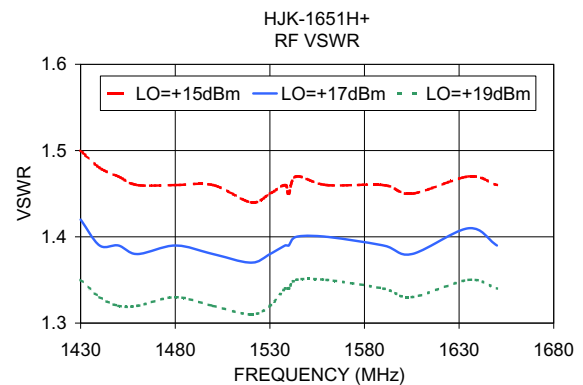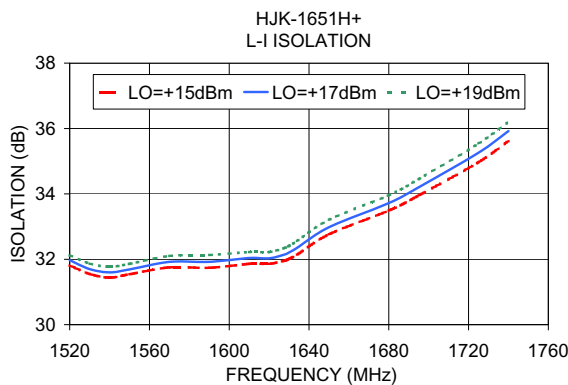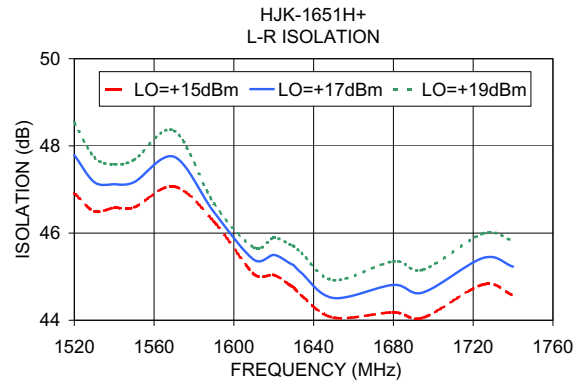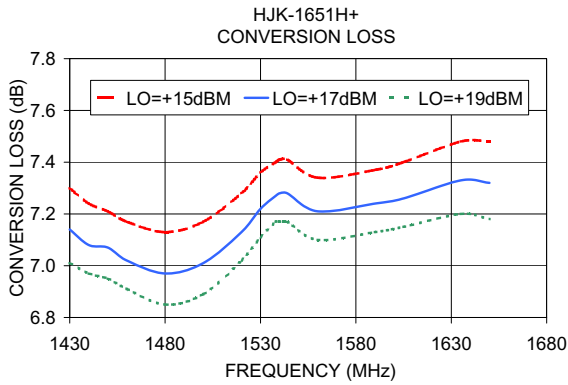

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).