

Surface Mount Directional Coupler

75Ω 50 to 750 MHz

JDC20-1W-75+ JDC20-1W-75



CASE STYLE: BH292
PRICE: \$ 13.60 ea. QTY (25-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4

Features

- low mainline loss, 0.5 dB typ.
- high directivity, 23 dB typ.
- excellent solderability

Applications

- communications
- level detecting
- signal sampling
- reflective power measurements
- cable tv


Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W			
	Nom.	Flatness	L		M		U		L		M		U			Typ.	Max.	Max.	
f _L -f _U			Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Max.
50-750	19.5±0.5	±0.5	0.5	0.9	0.5	0.7	0.5	0.9	25	18	23	15	20	15	1.2	0.5	0.5		

L = 50-100 MHz M = 100-375 MHz U = 375-750 MHz

1. Mainline loss includes theoretical power loss at coupled port.


Outline Drawing

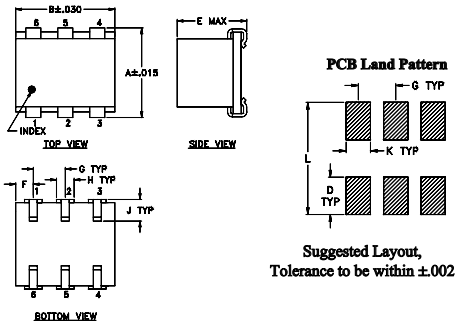

Outline Dimensions (inch/mm)



A	B	C	D	E	F	G			
.280	.310	--	.100	.225	.055	.100			
7.11	7.87	--	2.54	5.72	1.40	2.54			
H	J	K	L				wt		
.047	.065	.065	.300				grams		
1.19	1.65	1.65	7.62				0.45		

Demo Board MCL P/N: TB-33 Suggested PCB Layout (PL-044)

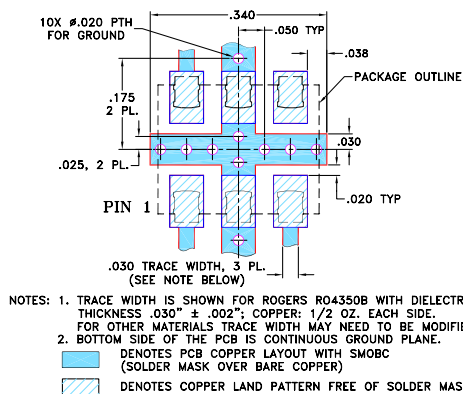


Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
50.00	0.48	19.58	24.37	25.24	26.25	27.37
108.33	0.45	19.62	24.92	28.13	30.65	27.75
166.66	0.44	19.64	24.65	29.48	32.97	24.47
225.00	0.44	19.64	24.06	29.91	32.60	21.93
283.33	0.43	19.63	23.38	29.72	28.79	20.07
341.66	0.43	19.58	22.71	29.40	27.19	18.71
458.33	0.43	19.48	21.60	28.25	25.93	16.90
575.00	0.44	19.36	21.05	25.97	24.48	15.96
633.33	0.44	19.27	21.06	25.57	24.08	15.67
750.00	0.46	19.09	21.56	25.20	24.45	15.43

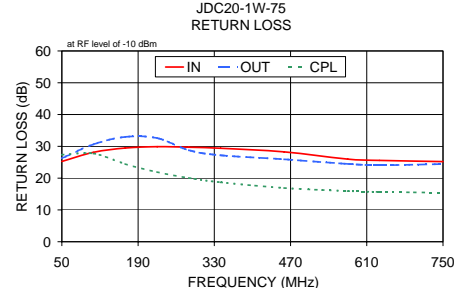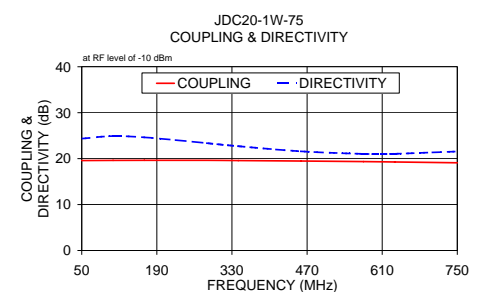

Electrical Schematic

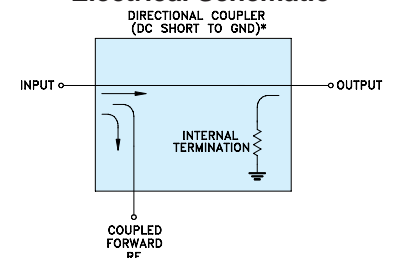

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

For detailed performance specs & shopping online see web site

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
I/F/R/F MICROWAVE COMPONENTS

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. D
M119986
ED-4562
JDC20-1W-75
WZ/TD/CP/AM
090903