

High IP3

Frequency Mixer WIDE BAND

MCA-50LH+

Level 10 (LO Power+10 dBm) 1000 to 5000 MHz



CASE STYLE: DZ883
PRICE: \$8.95 ea. QTY.(10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50 mW
IF Current	40 mA

Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

Features

- wide bandwidth, 1000 to 5000 MHz
- good L-R isolation, 25 dB typ.; L-I isolation, 30 dB typ.
- small size 0.25"x0.3"x0.2"
- aqueous washable
- triple balanced mixer
- protected by US Patent 6,917,796

Applications

- PCN
- satellite
- line of sight links
- WiMAX

Electrical Specifications (T_{AMB}=-55°C to 100°C)

FREQUENCY (MHz)	CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
	LO/RF f _L -f _U	IF	\bar{X} σ Max.	Typ.	Min.	Typ.	Min.	
1000-5000	10-1500		7.3 0.2 9.9					
1000-1400	10-400		6.8 0.1 8.5	20	11	32	25	17
1400-2000	10-600		6.6 0.1 7.7	25	20	32	25	17
2000-2600	10-600		7.8 0.2 9.9	25	18	30	24	18
2600-4500	10-1500		7.8 0.1 8.6	35	20	25	15	15
4500-5000	50-500		8.0 0.2 9.9	35	22	25	15	16


1 dB COMPR. +6 dBm typ.

• see individual band specs



Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)		Isolation L-R (dB)		Isolation L-I (dB)		VSWR RF Port (:1)		VSWR LO Port (:1)	
	RF	LO	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	
1000.00	1030.00	6.60	17.81	29.70	1.29	1.98				
1200.00	1230.00	6.15	24.04	29.91	1.21	2.24				
1400.00	1430.00	6.43	34.07	29.94	1.24	2.29				
1600.00	1630.00	6.37	39.60	29.40	1.25	2.44				
1800.00	1830.00	6.62	31.69	28.02	1.37	2.20				
2000.00	2030.00	6.78	24.37	27.19	1.46	2.26				
2200.00	2230.00	7.92	21.31	26.29	1.70	1.96				
2400.00	2430.00	8.07	20.77	27.01	1.75	1.90				
2600.00	2630.00	6.95	23.92	27.47	1.62	2.03				
2800.00	2830.00	6.40	27.26	27.23	1.77	1.77				
3000.00	3030.00	6.19	31.17	27.36	1.69	1.36				
3200.00	3230.00	5.94	32.33	27.58	1.72	1.18				
3400.00	3430.00	5.98	37.20	28.87	1.83	1.14				
3600.00	3630.00	5.98	38.18	28.74	1.93	1.26				
3800.00	3830.00	6.15	36.23	30.47	2.05	1.43				
4000.00	4030.00	6.45	34.76	32.27	2.17	1.60				
4200.00	4230.00	6.28	34.62	30.62	2.18	2.08				
4400.00	4430.00	6.12	31.09	29.11	2.21	2.52				
4600.00	4630.00	5.93	31.30	28.75	2.26	2.31				
5000.00	5030.00	5.70	37.55	29.58	1.92	1.52				

Electrical Schematic

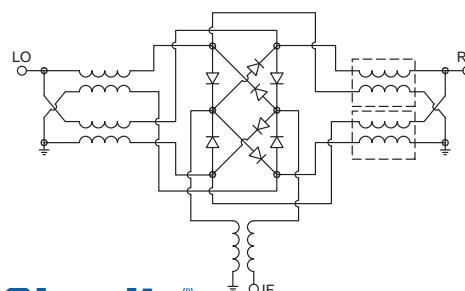

For detailed performance specs & shopping online see web site

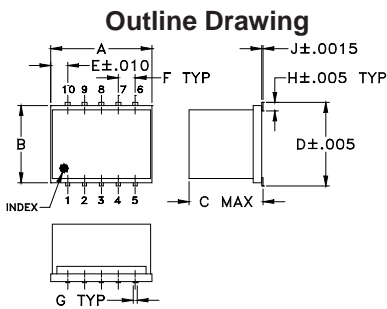


Suggested Layout, Tolerance to be within ±0.02

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.30	.250	.190	.266	.050	.050	.012
7.62	6.35	4.83	6.76	1.27	1.27	0.30
H	J	K	L	M	wt	
.029	.004	.085	.296	.030	grams	
0.74	0.10	2.16	7.52	0.76		0.5

Demo Board MCL P/N: TB-144
Suggested PCB Layout (PL-045)



NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED











The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. F
M108294
ED-9595A/2
MCA-50LH+
DJ/TD/CP/AM
080305
Page 1 of 2

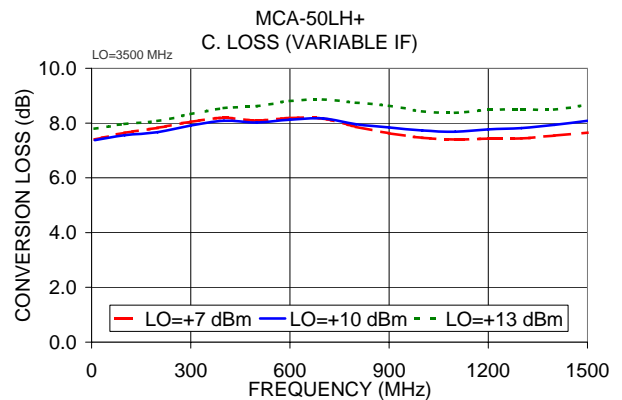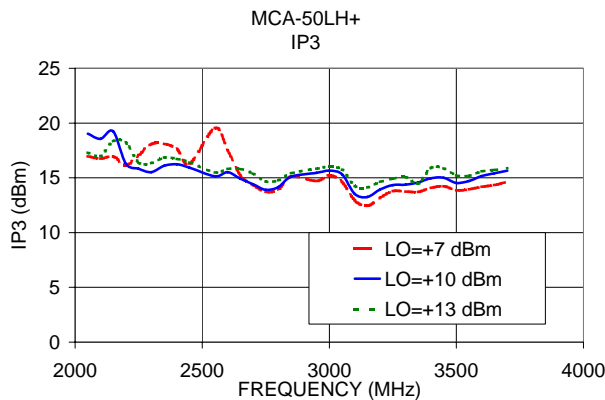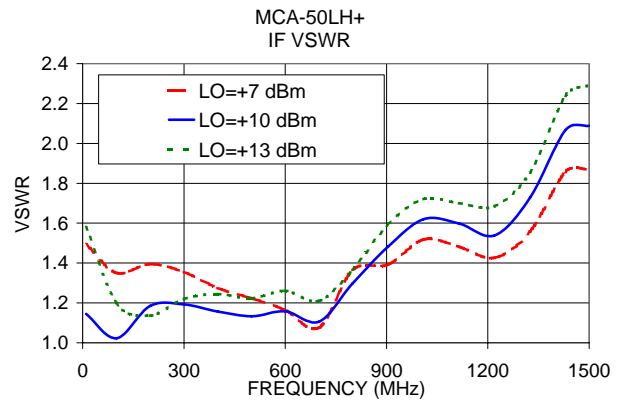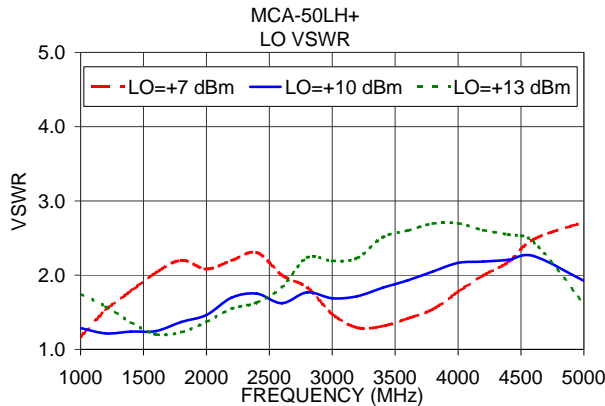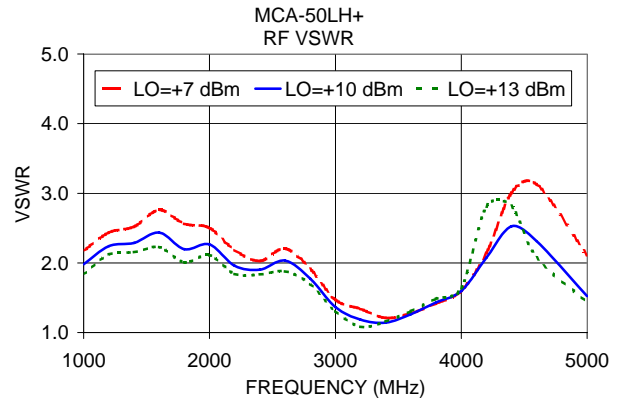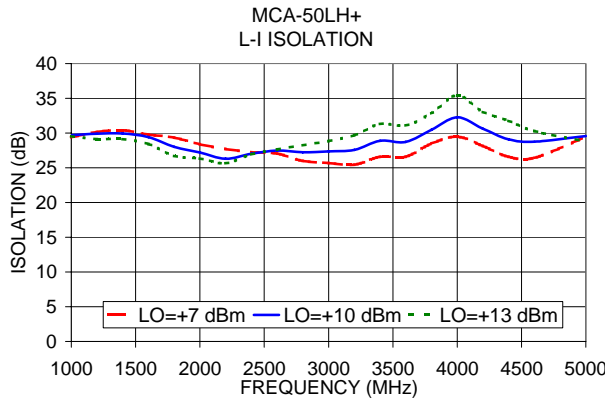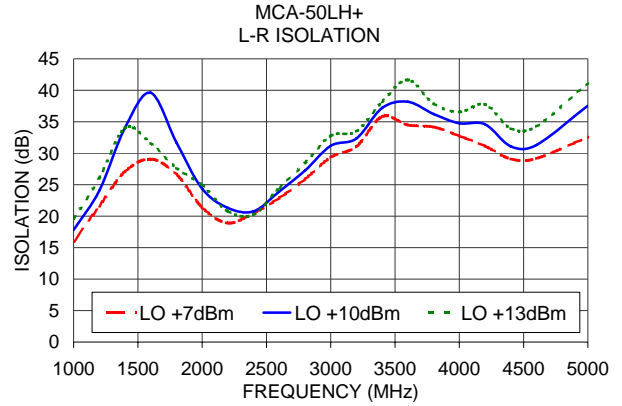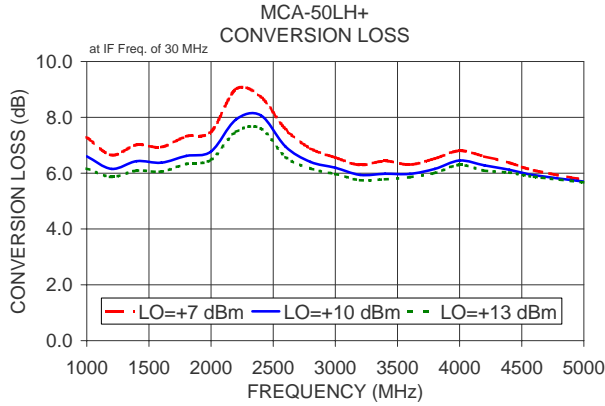

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.