

Surface Mount Power Splitter/Combiner

SBB-2-23+ SBB-2-23

2 Way-0° 50Ω 2000 to 2300 MHz



Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.25W max.

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

SUM PORT	2
PORT 1	6
PORT 2	4
GROUND	1,3,5

Outline Drawing

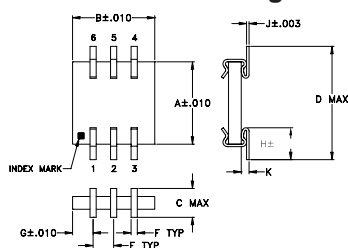


PCB Land Pattern



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
.200	.200	.070	.275	.050	.015	.050	.085	.006	.019
5.08	5.08	1.78	6.99	1.27	0.38	1.27	2.16	0.15	0.48
L	M	N	P	Q	R	S	T	wt	
.300	.064	.022	.032	--	.014	.030	.094	grams	
7.62	1.63	0.56	0.81	--	0.36	0.76	2.39	0.1	

Demo Board MCL P/N: TB-156 Suggested PCB Layout (PL-003)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- very stable performance over temp. range
- excellent insertion loss, 0.6 dB typ.
- excellent isolation, 24 dB typ.
- solder plated leads for excellent solderability and strain relief
- small size, 0.2"X0.275"X0.07"
- very low cost
- aqueous washable
- protected by U.S Patent, 6,819,202

Applications

- satellite communications
- mobile radio




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS ¹ (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
	Typ.	Min.	Typ.	Max.	Max.	Max.
$f_c - f_u$						
2000-2300	24	17	0.6	1.0	3.0	0.3
2100-2200	25	18	0.5	0.9	3.0	0.3

1. Includes test fixture losses

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
2000.00	3.55	3.66	0.10	21.03	0.34	1.29	1.06	1.06
2020.00	3.55	3.64	0.10	21.14	0.42	1.27	1.06	1.05
2040.00	3.55	3.64	0.09	21.19	0.49	1.25	1.06	1.04
2060.00	3.56	3.65	0.09	21.28	0.54	1.24	1.06	1.03
2080.00	3.55	3.65	0.10	21.29	0.37	1.23	1.07	1.02
2100.00	3.57	3.64	0.07	21.29	0.37	1.22	1.08	1.02
2120.00	3.59	3.64	0.05	21.27	0.52	1.21	1.10	1.03
2140.00	3.60	3.65	0.06	21.28	0.66	1.20	1.11	1.04
2160.00	3.57	3.65	0.08	21.22	0.75	1.20	1.12	1.05
2180.00	3.56	3.63	0.06	21.17	0.52	1.20	1.13	1.06
2200.00	3.60	3.63	0.04	21.11	0.51	1.19	1.15	1.07
2220.00	3.66	3.67	0.01	21.09	0.75	1.20	1.17	1.08
2240.00	3.66	3.68	0.02	21.04	0.96	1.20	1.18	1.10
2280.00	3.59	3.63	0.03	20.85	0.67	1.21	1.22	1.12
2300.00	3.68	3.67	0.01	20.83	0.73	1.22	1.23	1.14

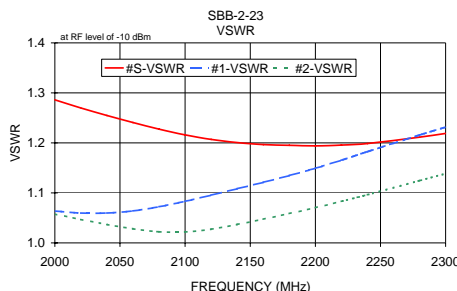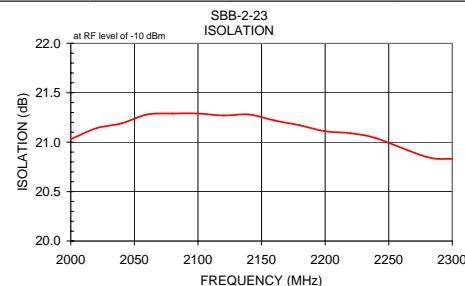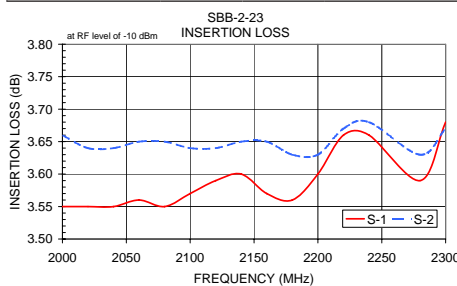

electrical schematic



Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IFIR MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. G
M11708
EDB-991111
SBB-2-23
BC/WZ/CP/AM
090824