

Bandpass Filter

SXBP-35W+

50Ω 24 to 46 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max.

Pin Connections

INPUT	1
OUTPUT	8
GROUND	2, 3, 4, 5, 6, 7


Outline Drawing

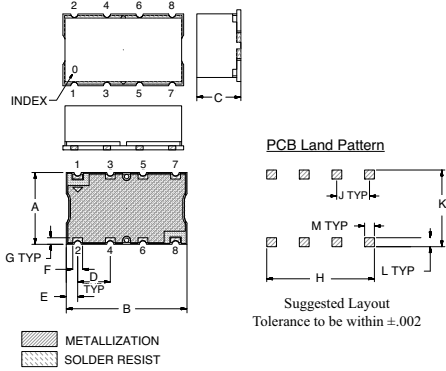

Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.440	.740	.27	.200	.07	.060	
11.18	18.80	6.86	5.08	1.78	1.52	
G	H	J	K	L	M	wt.
.040	.660	.200	.470	.055	.060	grams
1.02	16.76	5.08	11.94	1.40	1.52	3.0

Demo Board MCL P/N: TB-368 Suggested PCB Layout (PL-230)

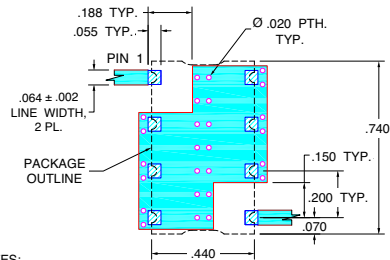


Features

- Excellent rejection
- Good VSWR, 1.1:1 Typ @ Passband

Applications

- FM Radio Rejection
- Receivers / Transmitters
- Professional Mobile Radio / Public Access Mobile Radio (PMR/ PAMR)



CASE STYLE: HF1139
 PRICE: \$15.95 ea. QTY (1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 1dB) F1 - F2	STOPBANDS (MHz)				VSWR (:1)	
		Loss > 20dB		Loss > 35dB		Passband Max.	Stopband Typ.
		F3	F4	F5	F6		
35	24 - 46	16	73	5	81 - 1000	1.5	18

Typical Frequency Response



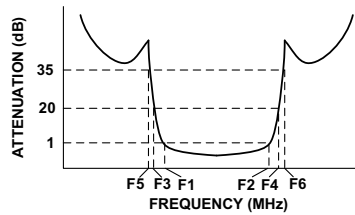


Functional Schematic

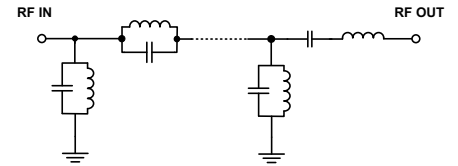

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nSec)
	\bar{x}	σ			
1.0	70.38	0.28	0.06	20.0	83.25
5.0	43.27	0.20	0.10	22.0	73.52
16.0	32.10	3.26	0.19	24.0	47.80
17.5	17.74	1.18	0.32	26.0	36.28
19.0	8.72	0.77	1.01	28.0	30.55
20.0	4.40	0.53	2.58	30.0	26.77
21.0	1.88	0.27	5.83	32.0	24.50
24.0	0.40	0.02	19.27	34.0	23.07
35.0	0.32	0.00	21.65	35.0	22.61
46.0	0.49	0.03	20.26	36.0	22.21
50.0	1.47	0.16	7.66	38.0	21.97
53.0	3.76	0.29	3.27	40.0	22.13
56.0	7.36	0.34	1.40	42.0	22.68
62.0	15.62	0.32	0.41	44.0	23.93
73.0	30.82	0.35	0.19	46.0	26.37
81.0	47.49	0.35	0.19	48.0	29.19
500.0	66.57	0.76	0.23	50.0	31.41
1000.0	56.95	0.81	0.39	52.0	31.21

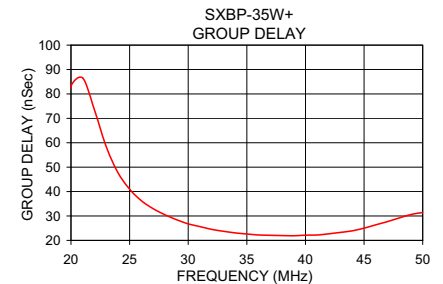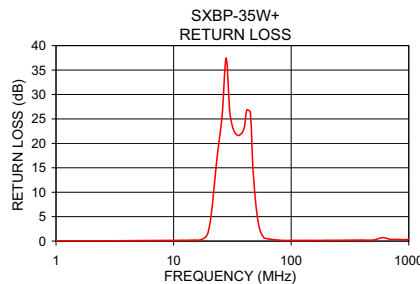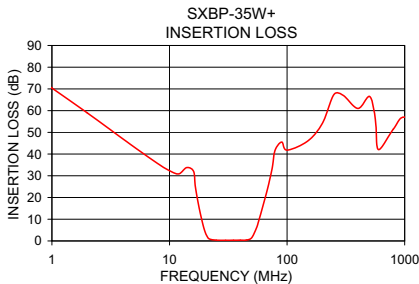

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
 M112217
 EDR-7460U
 SXBP-35W+
 URJ/RAV
 080422
 Page 1 of 1