

# High IP3 Frequency Mixer

Level 17 (LO Power +17 dBm) 800 to 1000 MHz

## SYM-10DH+ SYM-10DH



### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

### Pin Connections

LO	2
RF	1
IF	3
GROUND	4,5,6

### Features

- low conversion loss, 7.6 dB typ.
- excellent L-R isolation, 45 dB typ. & L-I isolation, 29 dB typ.
- high IP3, 31 dBm typ.
- excellent LO & RF VSWR, 1.32:1 typ. excellent IF VSWR, 1.1:1 typ.

### Applications

- cellular
- ISM/SMR/GSM

CASE STYLE: TTT167  
PRICE: \$9.95 ea. QTY (1-9)


**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

### Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)	LO-IF ISOLATION (dB)	IP3 at center band (dBm)
LO/RF $f_L - f_U$	IF $\bar{X}$	Total Range Max.	Typ. Min.	Typ. Min.
800-1000	20-200	7.6	9.3	45 34
1 dB COMP.: +14 dBm typ.				


### Outline Drawing

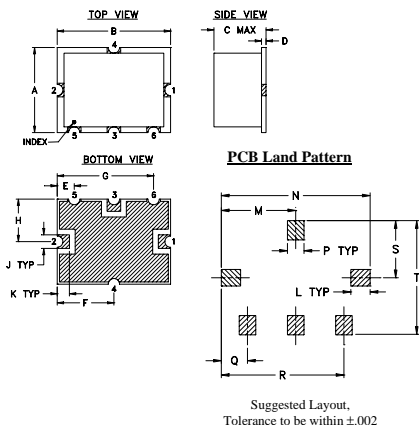

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27
L	M	N	P	Q	R	S	T	wt.	
.070	.270	.540	.060	.095	.445	.208	.415	grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8	


### Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

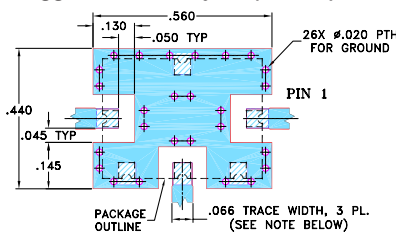

### Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
800.10	801.10	7.45	41.49	30.20	1.29	1.22
810.63	811.63	7.48	41.53	30.14	1.29	1.21
821.15	822.15	7.50	41.50	30.05	1.30	1.20
831.68	832.68	7.49	41.42	30.01	1.31	1.20
842.21	843.21	7.48	41.37	29.94	1.32	1.20
852.73	853.73	7.46	41.31	29.89	1.33	1.21
863.26	864.26	7.52	41.41	29.88	1.34	1.21
873.78	874.78	7.59	41.44	29.78	1.35	1.21
884.31	885.31	7.68	41.41	29.71	1.35	1.20
894.84	895.84	7.76	41.43	29.74	1.36	1.19
905.36	906.36	7.82	41.42	29.74	1.36	1.18
915.89	916.89	7.84	41.16	29.61	1.37	1.17
926.42	927.42	7.85	40.86	29.53	1.38	1.17
936.94	937.94	7.86	40.49	29.43	1.40	1.17
947.47	948.47	7.90	40.18	29.32	1.41	1.17
958.00	959.00	7.95	40.09	29.25	1.42	1.17
968.52	969.52	8.04	40.04	29.19	1.43	1.17
979.05	980.05	8.14	40.07	29.08	1.44	1.15
989.57	990.57	8.25	40.13	29.03	1.45	1.14
1000.10	1001.10	8.35	40.12	29.02	1.46	1.13

### Electrical Schematic

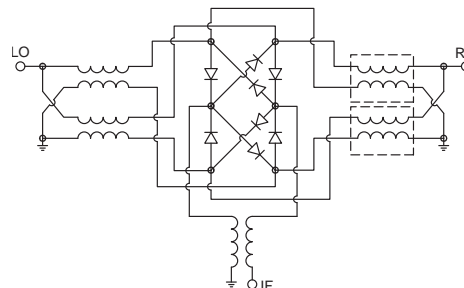

**Mini-Circuits**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. E  
M112207  
SYM-10DH  
ED-6487/2  
DJ/TD/AM  
091006  
Page 1 of 2

## Performance Charts

