

Ultra-Reliable Low Pass Filter

VLP-64

50Ω DC to 5400 MHz



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	19W max. at 25°C

* Passband rating, derate linearly to 0.4xPmax at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

Features

- rugged unibody construction
- low insertion loss passband, less than 1 dB typ.
- excellent power handling, 19W
- low cost


Applications

- harmonic rejection
- transmitters/receivers
- lab use

CASE STYLE: FF704

Connectors	Model	Price	Qty.
SMA	VLP-64	\$24.95 ea.	(1-9)

Outline Drawing

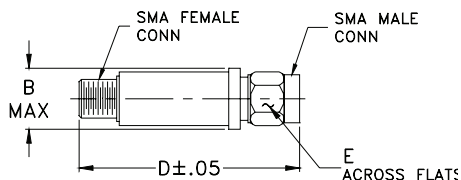


Outline Dimensions (inch/mm)

B	D	E	wt
.410	1.43	.312	grams
10.41	36.32	7.92	10.0


Electrical Specifications (T_{AMB}=25°C)

PASSBAND (MHz)	f _{co} , MHz Nom.	STOP BAND (MHz)	VSWR (:1)
(loss < 1 dB)	(loss 3 dB)		Passband
Typ.	Typ.	(loss > 20 dB)	Typ.
DC-5400	6410	9000	1.1
			fr20 dB Typ.
			18000

typical frequency response


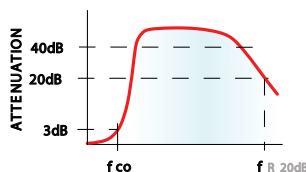


electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50.00	0.09	1.02
1000.00	0.16	1.04
2000.00	0.26	1.10
3000.00	0.38	1.19
4000.00	0.45	1.02
5400.00	0.73	1.11
6410.00	3.76	3.91
7000.00	9.80	11.81
9000.00	26.39	33.93
12000.00	37.61	49.56
15000.00	30.54	69.04
18000.00	27.29	55.01

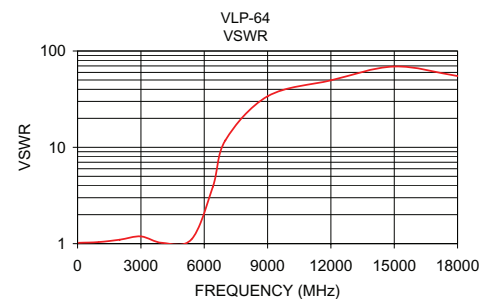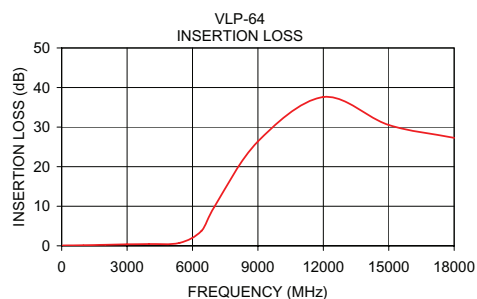

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

PDZ The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. A
M85674
VLP-64
ED-10545B/5
WZ/AD/CP
070301